

PRIMARY POWER UNIT 330

VAHLE

**NEW
PRODUCT
2019**



KEY SPECS

- Master can control up to 11 slaves
- Fast bootup
- Modular 3.3kW steps
- Easy tuning via jumpers
- Field bus control
- No external transformer needed
- Easy maintenance
- SD card with parameters
- System diagnostics
- Available with/ without mounting plate

vPOWER

PRIMARY POWER UNIT 330

TECHNICAL DATA

ELECTRICAL DATA

Supply Voltage	Supply Logic	Nominal Power	Track Current	Track Frequency
400-80VAC ±10% 50-60 Hz	24 VDC ±10%	3.3 kW	45A	140 kHz

COMMUNICATION (MASTER)

Fielbus	Max Amount (of slaves)
Ethernet/ IP Profinet IO	11


MECHANICAL DATA (MASTER)

Dimensions	Mounting Holes	Weight kg	Protection Rating
500x 445 x 256.4 mm	436x 429 mm	17.3 kg	IP54
Ambient Temperature Non-Condensing		Enviornment	
0 to +40 °C		Industrial	

MECHANICAL DATA (SLAVE)

Dimensions	Mounting Holes	Weight kg	Protection Rating
500 x 355 x 339 mm	436 x 339 mm	15.4 kg	IP20
Ambient Temperature Non-Condensing		Enviornment	
0 to +40 °C		Industrial	

SYSTEM OVERVIEW (WITHOUT MOUNTING PLATE)

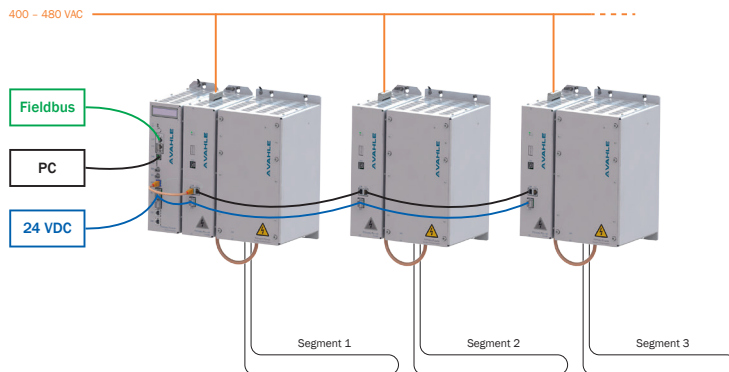

ORDERING INFORMATION

Mounting plate delivery:

PPU330 Master EtherNet	10022725
PPU330 Master Profinet	10023410
PPU330 Slave	10022726

Components delivery:

PPU330 Master EtherNet	10023411
PPU330 Master Profinet	10023412
PPU330 Slave	10023413

VAHLE Incorporated.
407 Cane Island Pkwy
Katy, TX 77494

Tel.: 713-465-9796
Fax: 713-465-1851
E-Mail: salesinbox@vahleinc.com
www.vahleinc.com

FOLLOW US @VAHLEINC.

