





**CONTACTLESS
POWER SUPPLY
CPS® 140kHz**

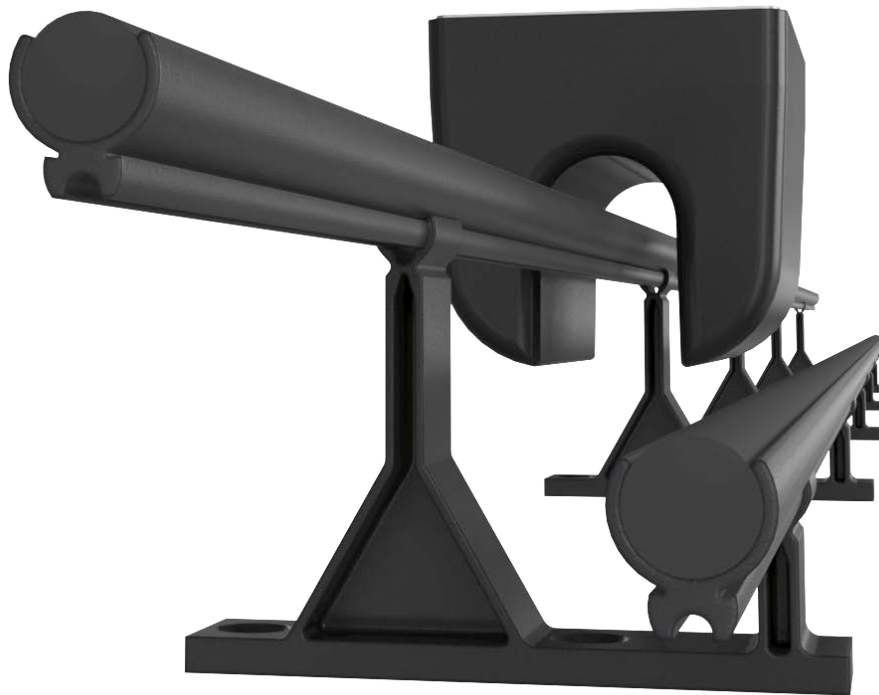

YOUR VISION – OUR SOLUTION

vPOWER – KEY HIGHLIGHTS

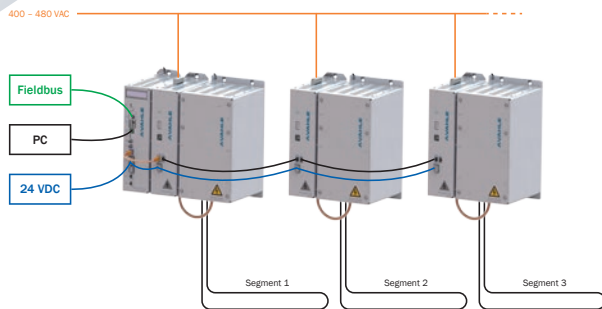


MODULAR DESIGN

Due to the modular structure of the vPOWER system, many diverse combinations of power ranges can be assembled. The primary side consists of 3.4 kW or 10 kW elements for a modular equipment.

Pickups with an output of 150 W–4 kW can be used on the secondary side. Additionally, it is possible to parallel the outputs from multiple secondaries to obtain higher power per vehicle. The top can switch from regulated DC output voltage to a DC-Bus that allows up to 30 kW.

SPACE-SAVING COMPACT DESIGN

The extreme compact design of the vPOWER components means a contactless power system can be implemented on vehicles with minimum space availability. New compensation boxes can be laid underground to minimize hazards and space needed. This is possible, in part, due to the separation of Pickup and Regulator. The Pickup needs to be mounted directly interfacing the primary track while the Regulator can be mounted anywhere on the vehicle allowing for easier access and maintenance. The connection between Pickup and Regulator is by coaxial cable which minimizes any radiated interference.

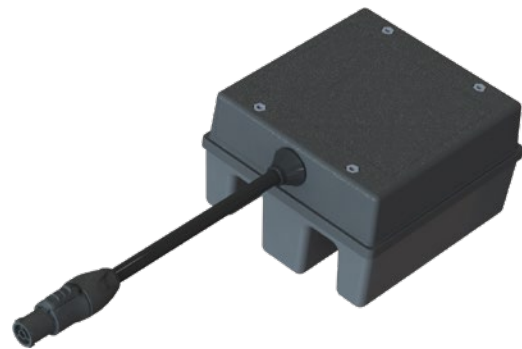


SERVICE AND DIAGNOSIS MODUL

vPOWER's primary-sided service and diagnostic module allow for whole-system performance control and monitoring. Fieldbus partnered with offered protocols PROFINET-IO, EtherNet-IP, and CC-Link IE, enable worldwide operational capabilities. Important system vitals such as current, voltage, phase angle, and more can be read via an integrated LCD display of a vPOWER system. All settings are stored on an SD card. Failures and interferences are recorded internally and can be transmitted via a selectable interface allowing fast diagnostics and solutions in case of an event.

GUIDANCE

The main function of the track power cables in the floor is to transfer power to the Pickup(s) on AGVs. However, these cables can also be tracked, using a guidance sensor, to provide a guidance signal to the AGV controller.

The VAHLE Guidance sensor can navigate straight and curved pathways, as well as switches, crossing and power loops. PROFINET-IO and Ether-Net-IP interfaces are available, to provide range of communication options AGV controllers.

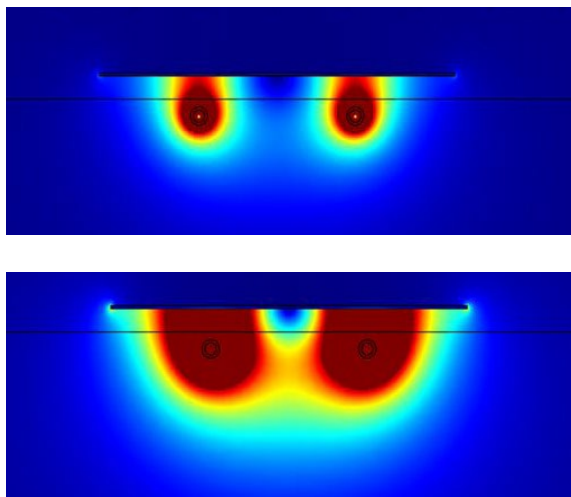


REDUCED IRON-FREE ZONE

By increasing the frequency by a factor of 7, the primary current compared to the former VAHLE inductive technology was reduced. This reduction has a great advantage — the distance to ferromagnetic metals can be reduced during power transfer significantly. When there is an aluminum plate within a distance of 20mm to the primary field, the power loss in the plate will be reduced by 56% compared to former VAHLE 124A 20kHz products, allowing a greater degree of autonomy in the laying of the primary cable.

LARGE LATERAL TOLERANCES


The goal during development was to increase the vertical and lateral displacement tolerances to a world class level never achieved before in the industry.


When the tolerances are exceeded only a small derating occurs. Even when the specified tolerance range is exceeding closely to the specified, only a small derating will occur. This makes it possible, to drive through most of the trajectory reliable.

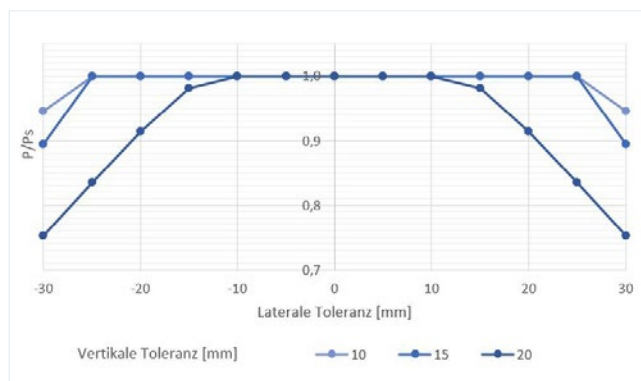

vPOWER – SYSTEM OVERVIEW

- ❶ PPU Primary Unit
- ❷ PPS: Primary Power Synchronization
- ❸ PPI: Primary Inverter
- ❹ PPGC: Gyrator and Compensation
- ❺ CX45: Track Power Coaxial Cable
- ❻ TPFB: Track Power Feed Box
(optional required, if Track Power Coaxial Cable CX45 required)
- ❼ PX45: Track Power Cable
- ❽ TPCB: Track Power Compensation Box
- ❾ F-PU: Flat Pickup
- ❿ CX12: Mobile Power Coaxial Cable
- ⓫ RE: Regulator

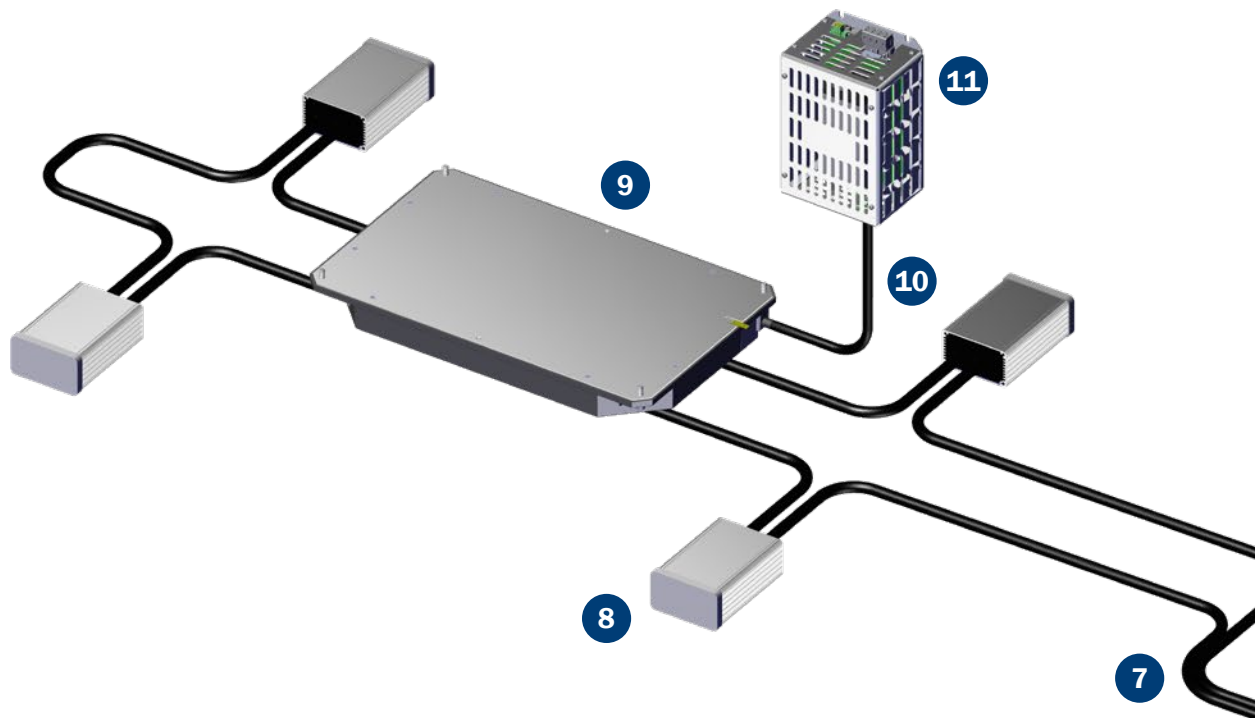

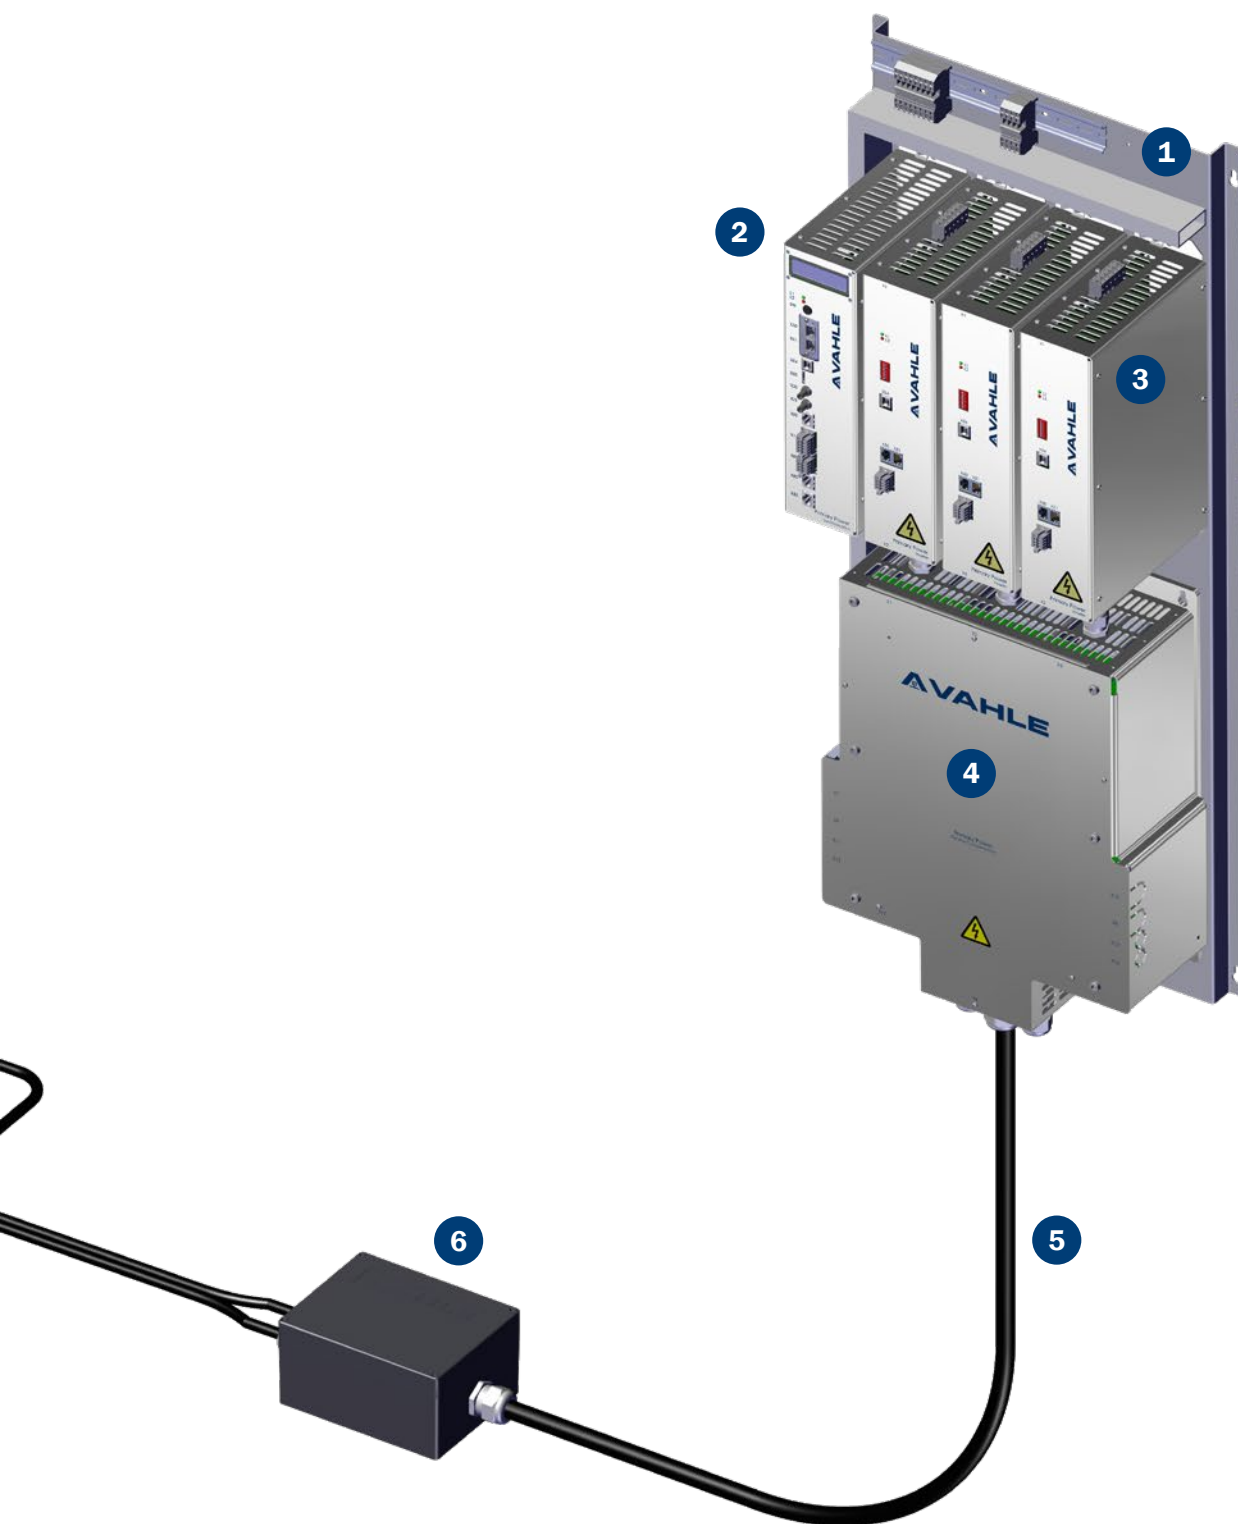

PRIMARY POWER UNIT – PPU330

TECHNICAL DATA

ELECTRICAL DATA

Power (nominal/peak)	3.3 kW
Supply voltage	400 ... 480 VAC $\pm 10\%$
	3 phase symmetric
Supply frequency	50 ... 60 Hz
Supply net system	TT, TN (grounded neutral)
Output current/ frequency	45 A / 140 kHz
Efficiency PPU	95 %
Auxilliary (required)	24 VDC $\pm 10\%$, 4 A

SCHNITTSTELLE

Interface	Profinet-IO
	EtherNet/IP
Data rate	500 kBit/s
Status information	Enable 140 kHz, fieldbus reset, fieldbus error, system error, warning

MECHANICAL DATA (MASTER)

Dimension (mounting plate) ..	500 x 445 x 256.4 mm
Dimension (components)	368.5 x 378.5 x 226.4 mm
Ambient temperature	0 ... +40 °C non-condensing
Operation	3M4, 7M2
Environment	General industrial
Cooling	Convection
Protection type	IP20
Connection power	Cage clamp 4 mm ²
Connection auxilliary	Cage clamp 1.5 mm ²
Connection fieldbus	RJ45



PPU330, 3.3 kW Master



PPU330, 3.3 kW Slave

MECHANICAL DATA (SLAVE)

Dimension (mounting plate) ..	500 x 355 x 256.4 mm
Dimension (components)	273.5 x 378.5 x 226.4 mm
Ambient temperature	0 ... +40 °C non-condensing
Operation	3M4, 7M2
Environment	General industrial
Cooling	Convection
Protection type	IP20
Connection power	Cage clamp 4 mm ²
Connection auxilliary	Cage clamp 1.5 mm ²
Connection fieldbus	RJ45

RANGE OF PRODUCTS

Description		Order No.
vPOW_PPU330.3-140-045-M-EI	Primary Unit 3.3 kW / Mounting plate / 140 kHz / 45 A / Master / EtherNet/IP	10027433
vPOW_PPU330.3-140-045-M-PN	Primary Unit 3.3 kW / Mounting plate / 140 kHz / 45 A / Master / Profinet IO	10027434
vPOW_PPU330.3-140-045-S-NI	Primary Unit 3.3 kW / Mounting plate / 140 kHz / 45 A / Slave / No Fieldbus	10027436
vPOW_PPU330.2-140-045-M-EI	Primary Unit 3.3 kW / Components with accessory / 140 kHz / 45 A / Master / EtherNet/IP	10023411
vPOW_PPU330.2-140-045-M-PN	Primary Unit 3.3 kW / Components with accessory / 140 kHz / 45 A / Master / Profinet IO	10023412
vPOW_PPU330.2-140-045-S-NI	Primary Unit 3.3 kW / Components with accessory / 140 kHz / 45 A / Master / No Fieldbus	10023413

Description	Order No.
vPOW_PPU10k.3-140-045-M-PN	Primary Unit 10 kW / 140 kHz / 45 A / Master / Profinet IO
vPOW_PPU10k.3-140-045-M-EI	Primary Unit 10 kW / 140 kHz / 45 A / Master / EtherNet/IP
vPOW_PPU10k.3-140-045-M-IO	Primary Unit 10 kW / 140 kHz / 45 A / Master / Digital I/O
vPOW_PPU10k.3-140-045-S-NI	Primary Unit 10 kW / 140 kHz / 45 A / Slave / No Fieldbus To extend the Primary Unit up to 20 kW or 30 kW
vPOW_PPU30k.1-140-045 expansion kit	Expansion Kit to install PPU30k
vPOW_FOC-05	Fiber optic cable for synchronizing the Primary Power Unit / FOC Cable - pre-terminated 5 m / U-DQ(ZN)BH
vPOW_FOC-10	Fiber optic cable for synchronizing the Primary Power Unit / FOC Cable - pre-terminated 10 m / U-DQ(ZN)BH
vPOW_FOC-25	Fiber optic cable for synchronizing the Primary Power Unit / FOC Cable - pre-terminated 25 m / U-DQ(ZN)BH
vPOW_FOC-50	Fiber optic cable for synchronizing the Primary Power Unit / FOC Cable - pre-terminated 50 m / U-DQ(ZN)BH


TRACK EQUIPMENT



Coaxial cable



Distance cable

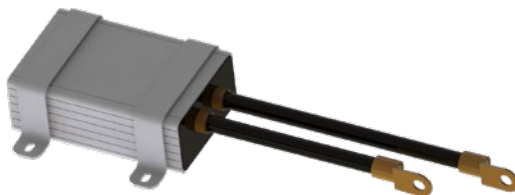

Compensation box with mounting kit



Connection boxes

RANGE OF PRODUCTS

Description		Order No.
vPOW_CX45	Track Power Coaxial Cable between PPU and TPFB / 140 kHz / 45 A	10021717
vPOW_PX45	Track Power Litz Cable / 140 kHz / 45 A	10021716
vPOW_TPCB1-140-045-F	Track Power Compensation Box / 140 kHz / 45 A / Fixed capacity	10017421
vPOW_TPCB.1-140-045-F mounting kit	2x Mounting bracket for TPCB mounting	10023171
vPOW_TPFB.1-140-045-1	Track Power Feed Box / 140 kHz / 45 A / 1 Power output Box for connection between Track Power Coaxial Cable CX45 and Primary Cable PX45	10017422
vPOW_TPFB.2-140-045-1	Track Power Feed Box / 140 kHz / 45 A / 1 Power output Box for connection between Primary Cable PX45 and Primary Cable PX45	10022184
vPOW_TPFB.1-140-045-2	Track Power Feed Box / 140 kHz / 45 A / 1 Power output Box for connection between Primary Cable PX45 and 2x Primary Cable PX45	10022185
vPOW_TPFB.1-45-140-6	Track Power Feed Box / 140 kHz / 45 A / 6 Power outputs Box for connection between Track Power Coaxial Cable CX45 and 6x Primary Cable PX45	10019008

VEHICLE EQUIPMENT – GUIDANCE


TECHNICAL DATA

MECHANICAL DATA

Dimension..... 239.45 x 155 x 46.50 mm
 Mounting holes..... 140 x 141 mm
 Weight..... 1 kg
 Protection type IP54
 Ambient temperature..... 0 ... 40 °C non-condensing
 Environment General industrial



BLOCK DIAGRAM

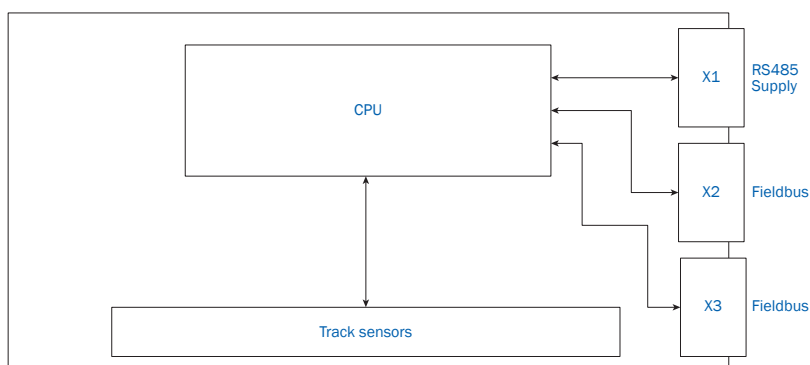

RANGE OF PRODUCTS

Description		Order No.
vPOW_Pilot.1-45-140-PN	Guidance Sensor / 140 kHz / 45 A / Profinet IO	10018392
vPOW_Pilot.1-45-140-EI	Guidance Sensor / 140 kHz / 45 A / EtherNet/IP	10018394

PRINCIPLE ARRANGEMENT TRACK GUIDANCE




Bottom view

EMS INSTALLATION


OVERVIEW E-PICKUP

- 1 Cable conduit
- 2 Feeding (active conductor)
- 3 Spacer for cable conduit
- 4 Spacer for cable conduit (mirrored)
- 5 Compact hanger

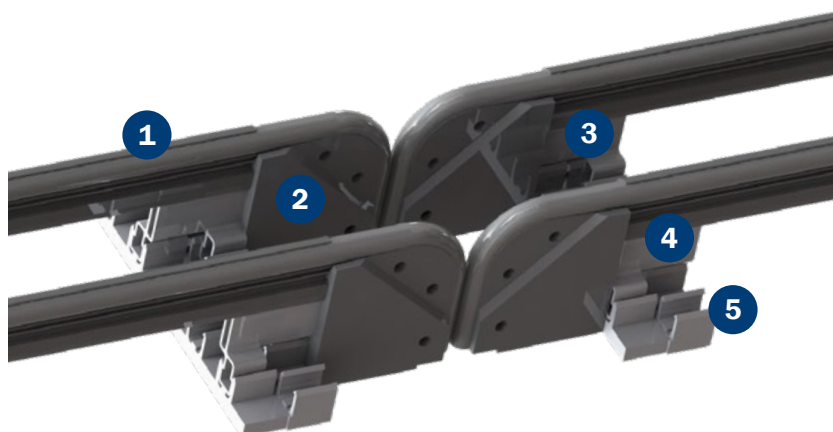

OVERVIEW U-PICKUP

- 1 Cable conduit
- 2 Feeding (active conductor)
- 3 Feeding (passive conductor)
- 4 Spacer for cable conduit
- 5 Filling rod for cable conduit
- 6 Compact hanger

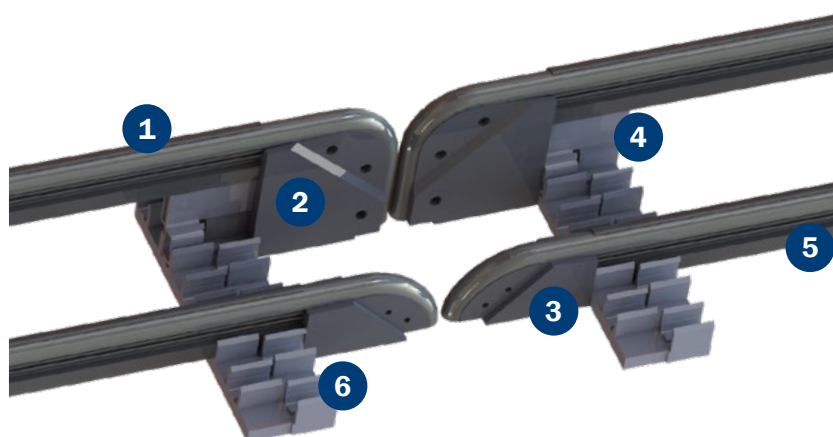


RANGE OF PRODUCTS

Description		Order No.
AH-KA10L-8/16,5-10N-PA-14	Screwed compact hanger 8 pole	0142075
AH-KA10L-10/16,5-N-PA-14	Screwed compact hanger 10 pole	0142076
PLZL-A071,8/00000-090-0H-11,0-K-0000-0+V	Feeding / active conductor / use with screwed compact hanger	10025930
PLZL-A030,0/00000-090-0R-11,0-K-0000-0+V	Feeding / passive conductor	10022182
PLAH-A52,7/00000-000-00-0000-0-0000-1+V	Spacer for cable conduit / 52.7 mm	10020582
PLAH-A52,7/00000-000-MI-0000-0-0000-1+V	Spacer for cable conduit / mirrored / 52.7 mm	10024107
PLKL-A006,5/00000-000-00-11,0-E-6000-1+V	Cable conduit / straight / D = 11 mm / 6 m	0915116
PLKL-A006,5/00000-000-00-11,0-E-2000-1+V	Cable conduit / straight / D = 11 mm / 2 m	0915155
PLKL-A006,5/00000-UNI-HR-11,0-0-3000-6+V	Cable conduit / curved / D = 11 mm / 3 m	10020864
FÜLLSTAB FÜR VKS-PROFIL	Filling rod for the cable conduit of the passive conductor / 3 m	1023278

SORTER INSTALLATION

- 1 Spacer for compact hanger
- 2 Spacer for feeding left
- 3 Feeding (active conductor)
- 4 Spacer for feeding right
- 5 Compact hanger sorter mounting
- 6 Spacer for cable conduit
- 7 Cable conduit
- 8 Feeding (passive conductor)

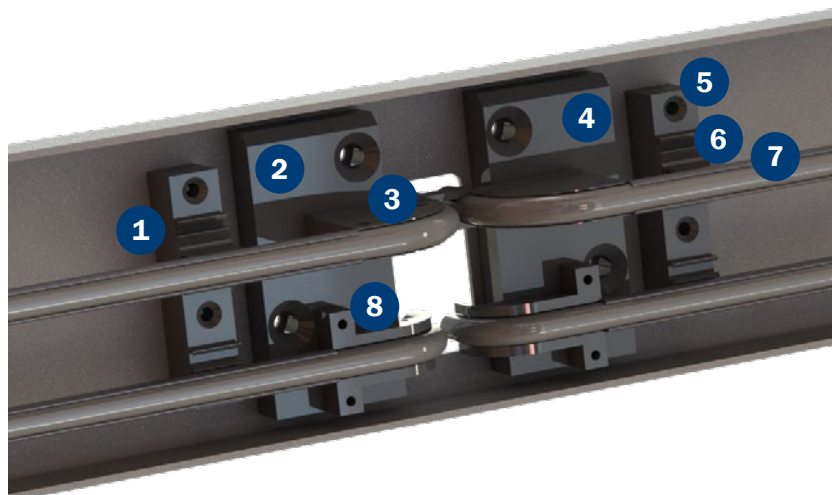


RANGE OF PRODUCTS

Description		Order No.
PLKH-B007,5/00000-010-02-000D-0-0000-1+V	Compact hanger sorter mounting	0915206
PLAH-B034,8/00000-000-00-0000-0-0000-1+V	Spacer for cable conduit / 39.3 mm	0915179
PLZL-0050,0/00000-090-H0-11,0-0-0000-4+V	Feeding / active conductor	0915295
PLZL-0015,2/00000-090-R0-11,0-0-0000-4+V	Feeding / passive conductor	0915296
PLKL-B007,7/00000-000-00-11,0-E-6000-1+V	Cable conduit / straight / D = 11 mm / 6 m	0915177
PLKL-B007,7/00000-000-00-11,0-E-2000-1+V	Cable conduit / straight / D = 11 mm / 2 m	0915298
PLKL-B007,7/00000-000-00-11,0-E-0020-1+V	Cable conduit / straight / D = 11 mm / 20 mm	10024680
PLZL-Z018,5/00000-010-HR-000H-L-0000-4+U	Spacer for feeding left	10001430
PLZL-Z018,5/00000-010-HR-000H-R-0000-4+U	Spacer for feeding right	1001426
PLAH-Z018,5/00000-010-HR-000D-0-0000-0+V	Spacer for compact hanger	10022382

U015 – SYSTEM INTEGRATION

EXAMPLE: SORTER INSTALLATION

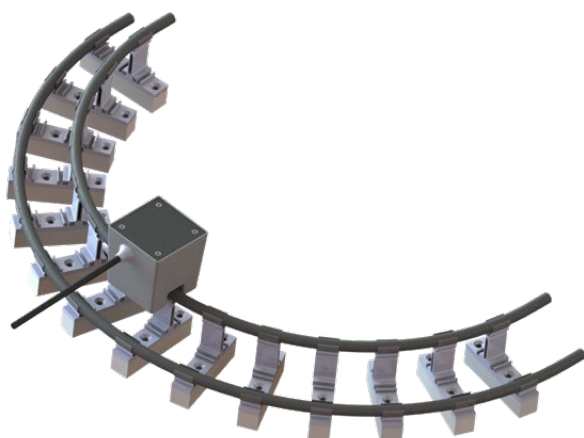


VEHICLE EQUIPMENT FOR 560 V AND 283 V

E-PICKUP E400-140 AND REGULATOR RE400



BLOCK DIAGRAM

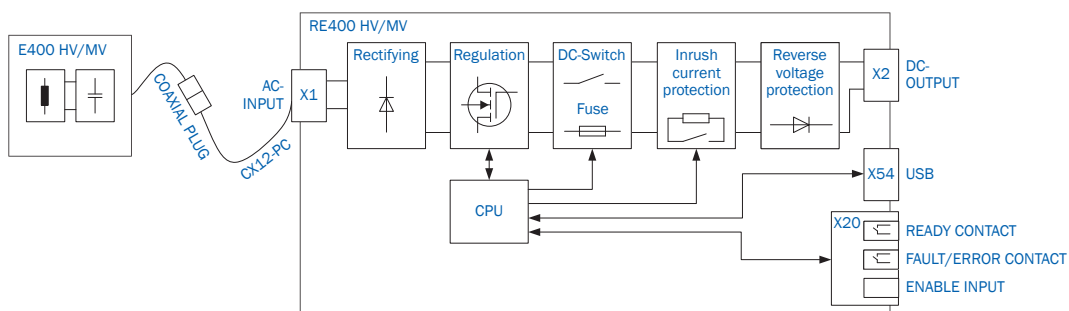

RANGE OF PRODUCTS

Description		Order No.
vPOW_E400.1-140-045-04-L0-HV-05	E-Pickup / 4 kW / 140 kHz / 45 A / Duty 40 % / Linear / High Voltage / Nominal power 1.6 kW / Peak power 4 kW	10023621
vPOW_RE400.2-140-560-04-NI-LI-RC-NI	Regulator / 1.6 kW / 140 kHz / 560 V / ED 40 % / Thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 560 VDC $\pm 5\%$ / Peak power 4 kW / No Battery Charging / Parallelizable output	10023622
vPOW_E400.1-140-045-02-L0-MV-05	E-Pickup / 4 kW / 140 kHz / 45 A / Duty 20 % / Linear / Mid Voltage / Nominal power 1.6 kW / Peak power 4 kW	10023601
vPOW_RE400.2-140-283-02-NI-LI-RC-NI	Regulator / 1.6 kW / 140 kHz / 283 V / ED 20 % / Thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 283 VDC $\pm 5\%$ / Peak power 4 kW / No Battery Charging / Parallelizable output	10023602
vPOW_CX12-PC	Track Power Coaxial Cable between Pickup and Regulator / 12 A	see page 24

TECHNICAL DATA

ELECTRICAL DATA

Peak power	4 kW
Nominal power	1.6 kW
Output voltage	560 VDC / 283 VDC $\pm 5\%$
Output current max.....	8 A / 16 A
Duty cycle.....	40% / 20% Duty (10 min cycle)
Track current	45 A
Track frequency.....	140 kHz
Track conductor spacing.....	70 mm

PROTECTION

Output over voltage.....	Yes
Output over current.....	Yes
Pickup monitoring	I ² T
Inrush current limitation	integrated precharging circuit
Max. reverse voltage	750 VDC

REGULATOR MECHANICAL DATA

Dimension.....	245 x 156 x 90 mm
Mounting holes.....	235.25 x 99 mm
Weight.....	1.6 kg
Protection rating.....	IP20
Ambient temperature.....	0 ... +40 °C non-condensing
Environment	General industrial


PICKUP CONNECTION CABLE

Length	0.5/1.5/3.5/5.5
Outer diameter	11 mm
Connections.....	Pre-terminated
Application	Flexible
Min. bending radius	8 x D


PICKUP MECHANICAL DATA

Dimension.....	166.6 x 159.6 x 109.5 mm
Mounting holes.....	133 x 85 mm
Weight.....	5 kg
Nominal airgap.....	8 mm (from top of track cable to bottom of Pickup)
Vertical tolerances	± 8 mm
Lateral tolerances	± 8 mm
Protection rating.....	IP54
Color.....	RAL 9004
Ambient temperature.....	0 ... +40 °C non-condensing
Environment	General industrial
Cooling	Natural convection


DIMENSIONS

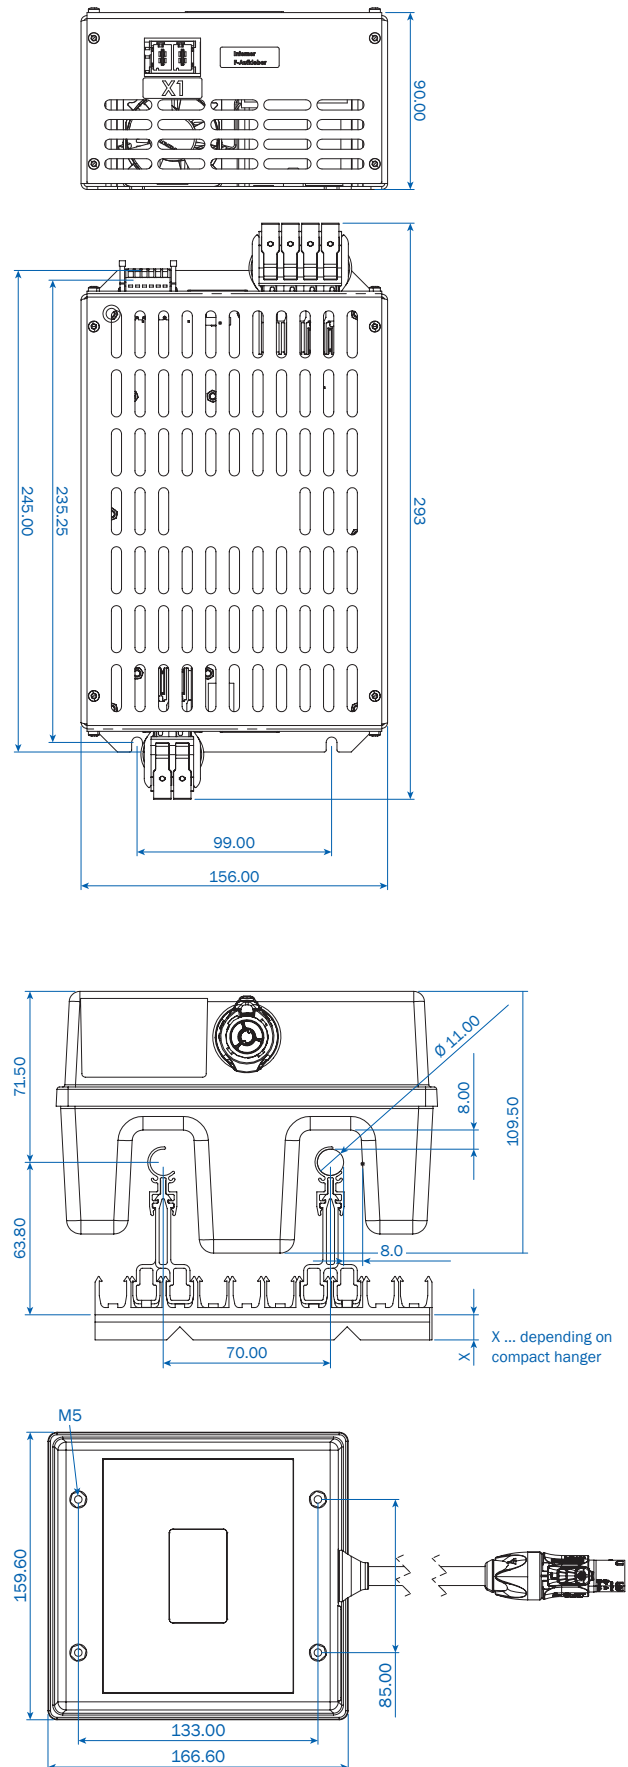

VEHICLE EQUIPMENT FOR 560 V F-PICKUP FXXX-140 AND REGULATOR REXXX

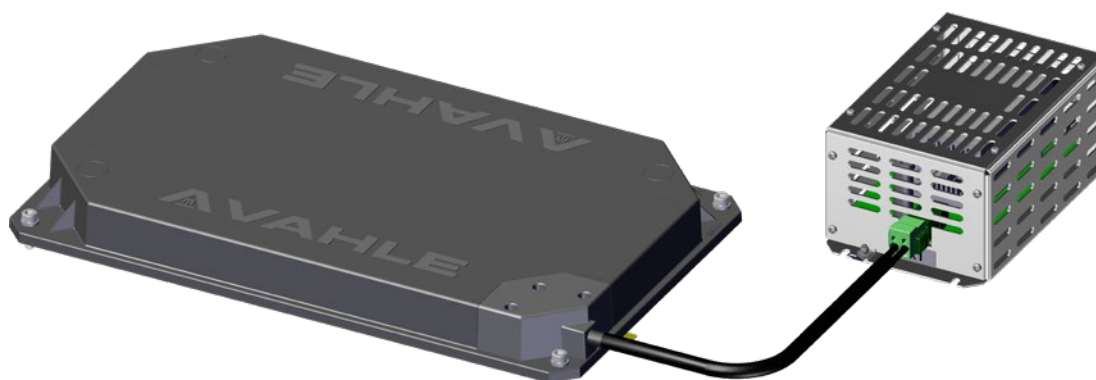

BLOCK DIAGRAM

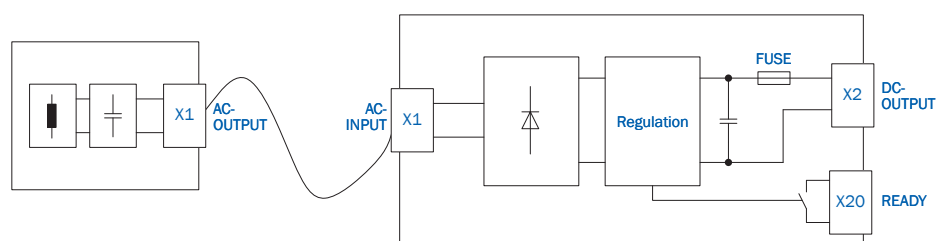

RANGE OF PRODUCTS

Description		Order No.
vPOW_F330.1-140-045-04-L0-HV	F-Pickup / 3.3 kW / 140 kHz / 45 A / Duty 40 % / Linear / High Voltage / Nominal power 1.3 kW / Peak power 3.3 kW	10017429
vPOW_RE330.1-140-560-04-NI-LI-RC-NI	Regulator / 3.3 kW / 140 kHz / 560 V / Duty 40 % / No thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 560 VDC $\pm 5\%$ / Peak power 3.3 kW / No Battery Charging / Parallelizable output	10017430
vPOW_F250.1-140-045-04-L0-HV	F-Pickup / 2.5 kW / 140 kHz / 45 A / Duty 40 % / Linear / High Voltage / Nominal power 1.0 kW / Peak power 2.5 kW	10018442
vPOW_RE250.1-140-560-04-NI-LI-RC-NI	Regulator / 2.5 kW / 140 kHz / 560 V / Duty 40 % / No thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 560 VDC $\pm 5\%$ / Peak power 2.5 kW / No Battery Charging / Parallelizable output	10018452
vPOW_CX12-SF	Track Power Coaxial Cable between Pickup and Regulator / 12 A / Spring-cage connection F-Pickup	see page 24

TECHNICAL DATA

ELECTRICAL DATA

Peak power	3.3 / 2.5 kW
Nominal power	1.3 / 1.0 kW
Output voltage	560 VDC $\pm 5\%$
Output current max.....	6.5 A
Duty cycle.....	40% Duty (10 min cycle)
Track current	45 A
Track frequency	140 kHz
Track conductor spacing.....	110 mm

PROTECTION

Output over voltage.....	Yes
Output over current.....	Yes
Max. reverse voltage.....	750 VDC

REGULATOR MECHANICAL DATA

Dimension.....	190 x 120 x 85 mm
Mounting holes.....	180.5 x 80 mm
Weight	1 kg
Protection rating.....	IP20
Ambient temperature.....	0 ... +40 °C non-condensing
Environment	General industrial





PICKUP CONNECTION CABLE

Length	1/2/4/6 m
Outer diameter	11 mm
Connections.....	Pre-terminated
Application.....	Flexible
Min. bending radius	8 x D

PICKUP MECHANICAL DATA

Dimension.....	415 x 255 x 39.5 mm
Mounting holes.....	385 x 225 mm
Weight	10 kg
Nominal airgap	15 mm (from top of track cable to bottom of Pickup)
Vertical tolerances	± 5 mm
Lateral tolerances	± 20 mm
Protection rating.....	IP54
Color	RAL 9004
Ambient temperature.....	0 ... +40 °C non-condensing
Environment	General industrial
Cooling	Natural convection

DIMENSIONS

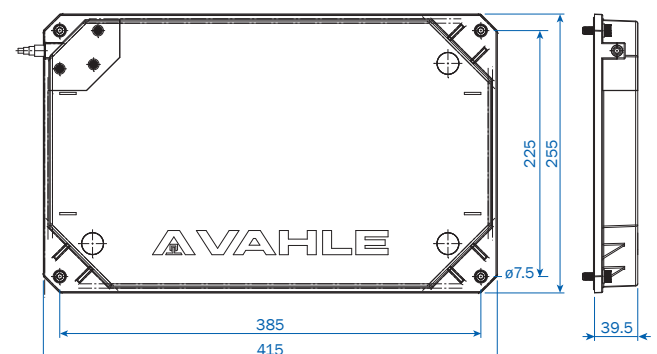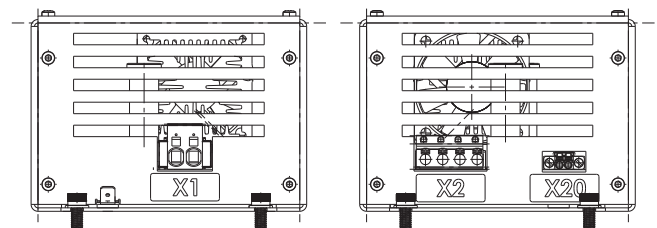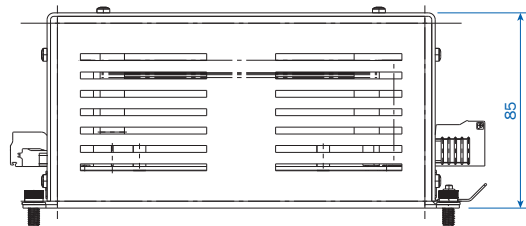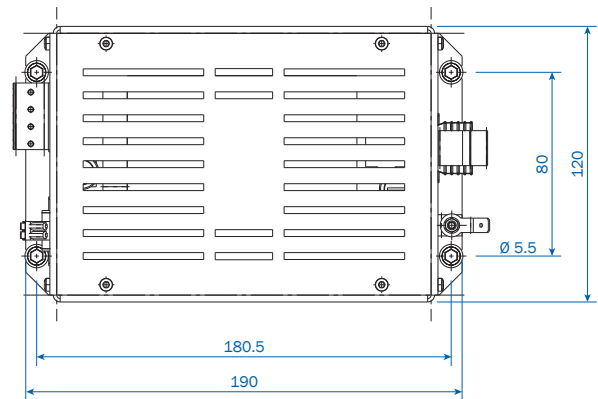


VEHICLE EQUIPMENT FOR 560V AND 283 V

U-PICKUP U150-140 AND REGULATOR RE150



BLOCK DIAGRAM

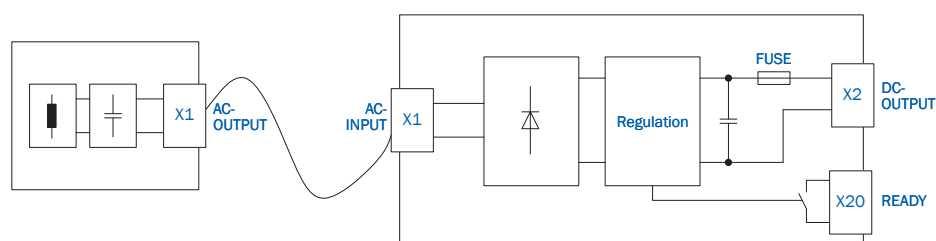

RANGE OF PRODUCTS

Description		Order No.
vPOW_U150.1-140-045-04-LO-HV	U-Pickup / 1.5 kW / 140 kHz / 45 A / Duty 40 % / Linear / High Voltage / Nominal power 0.6 kW / Peak power 1.5 kW	10018449
vPOW_RE150.1-140-560-04-NI-LI-RC-NI	Regulator / 1.5 kW / 140 kHz / 560 V / Duty 40 % / No thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 560 VDC $\pm 5\%$ / Peak power 1.5 kW / No Battery Charging / Parallelizable output	10018453
vPOW_U150.1-140-045-04-LO-MV	U-Pickup / 1.5 kW / 140 kHz / 45 A / Duty 40 % / Linear / Mid Voltage / Nominal power 0.6 kW / Peak power 1.5 kW	10023615
vPOW_RE150.1-140-283-04-NI-LI-RC-NI	Regulator / 1.5 kW / 140 kHz / 283 V / Duty 40 % / No thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 283 VDC $\pm 5\%$ / Peak power 1.5 kW / No Battery Charging / Parallelizable output	10023616
vPOW_CX12-HU	Track Power Coaxial Cable between Pickup and Regulator / 12 A / Hotmelt connection U-Pickup	see page 24

TECHNICAL DATA

ELECTRICAL DATA

Peak power 1.5 kW
 Nominal power 0.6 kW
 Output voltage 560 VDC / 283 VDC $\pm 5\%$
 Output current max..... 3 A / 6 A
 Duty cycle..... 40% Duty (10 min cycle)
 Track current 45 A
 Track frequency..... 140 kHz

PROTECTION

Output over voltage..... Yes
 Output over current..... Yes
 Max. reverse voltage..... 750 VDC

REGULATOR MECHANICAL DATA

Dimension..... 190 x 120 x 85 mm
 Mounting holes..... 180.5 x 80 mm
 Weight..... 1 kg
 Protection type IP20
 Ambient temperature..... 0 ... +40 °C non-condensing
 Environment General industrial







PICKUP CONNECTION CABLE

Length..... 1/2/4/6 m
 Outer diameter 11 mm
 Connections..... Pre-terminated
 Application..... Flexible
 Min. bending radius 8 x D


PICKUP MECHANICAL DATA

Dimension..... 128 x 86 x 84 mm
 Mounting holes..... 104 x 68 mm
 Weight..... 3 kg
 Nominal airgap..... 15 mm (from top of track
 cable to bottom of Pickup)
 Vertical tolerances ± 15 mm
 Lateral tolerances ± 10 mm
 Protection type IP54
 Color..... RAL 9004
 Ambient temperature..... 0 ... +40 °C non-condensing
 Environment General industrial
 Cooling Natural convection


DIMENSIONS

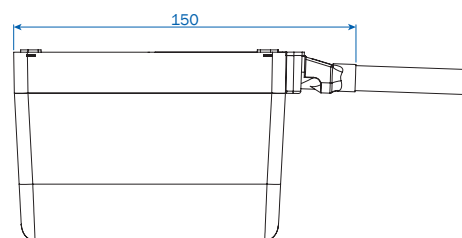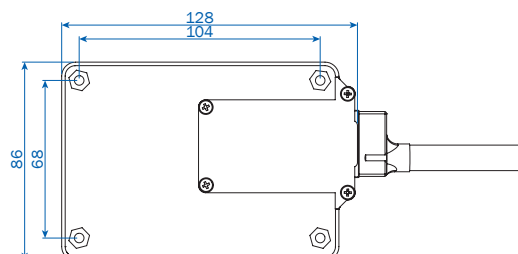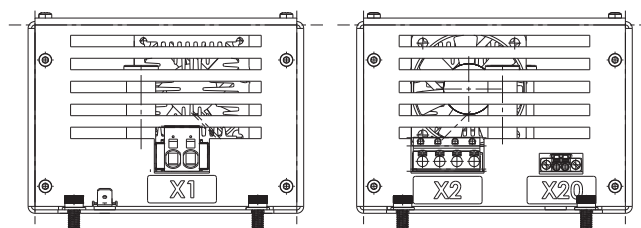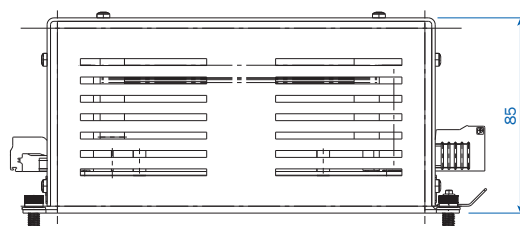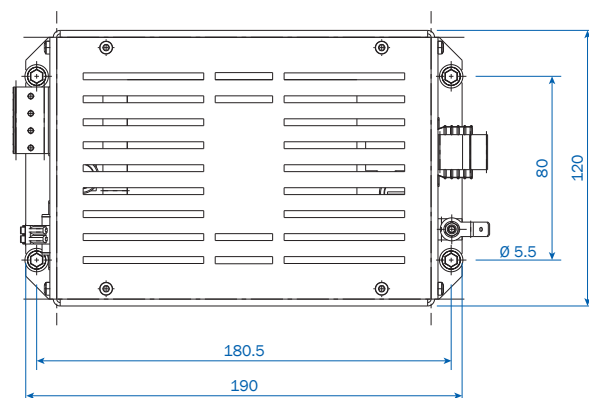

VEHICLE EQUIPMENT FOR 24 V AND 48 V F-PICKUP FXXX-140 AND REGULATOR REXXX

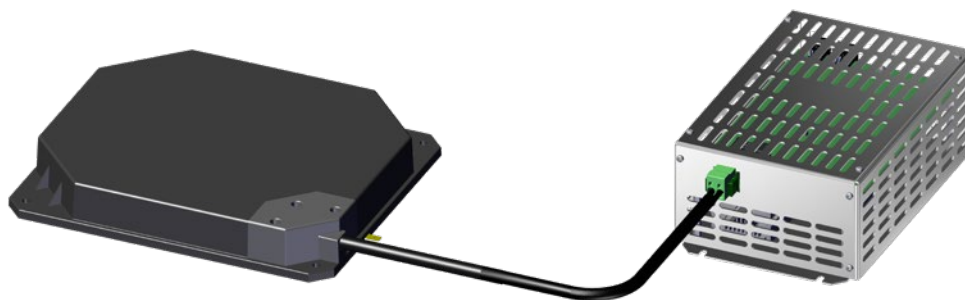

BLOCK DIAGRAM

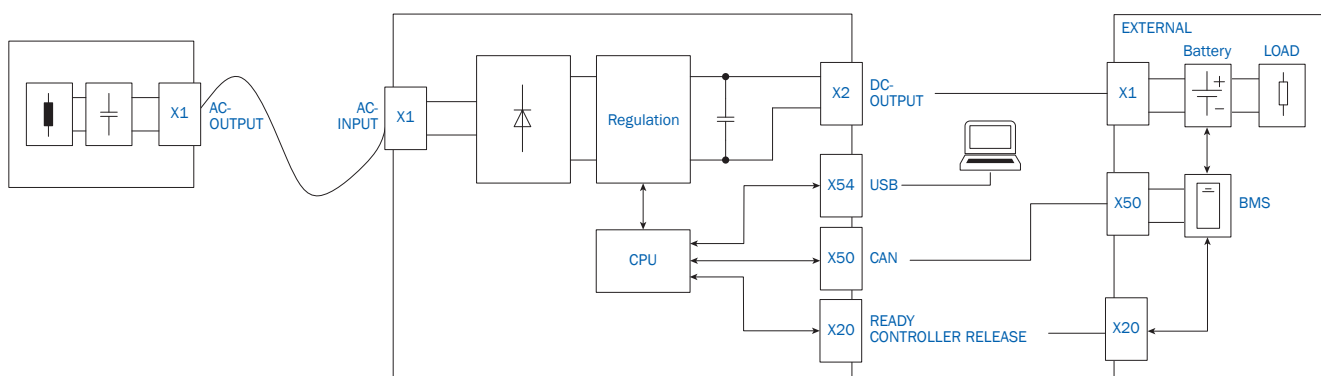

RANGE OF PRODUCTS

Description		Order No.
vPOW_F075.1-140-045-10-LP-LV	F-Pickup / 0.75 kW / 140 kHz / 45 A / Duty 100 % / Linear, Punctual / Low Voltage / Peak power 0.75 kW	10018445
vPOW_RE075.1-140-024-10-FA-AD-CA-NI	Regulator / 0.75 kW / 140 kHz / 24 V / Duty 100 % / Thermal monitoring / Advanced / CAN / Low Voltage / No Auxilliary / Output voltage 24 VDC / Peak power 0.75 kW / Battery Charging (external BMS)	10018411
vPOW_RE075.1-140-024-04-FA-LI-RC-NI	Regulator / 0.75 kW / 140 kHz / 24 V / Duty 40 % / Thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 24 VDC $\pm 5\%$ / Peak power 0.75 kW / No Battery Charging / Parallelizable output	10018454
vPOW_F150.1-140-045-10-LP-LV	F-Pickup / 1.5 kW / 140 kHz / 45 A / Duty 100 % / Linear, Punctual / Low Voltage / Peak power 1.5 kW	10018444
vPOW_RE150.1-140-048-10-FA-AD-CA-NI	Regulator / 1.5 kW / 140 kHz / 48 V / Duty 100 % / Thermal monitoring / Advanced / CAN / No Auxilliary / Output voltage 48 VDC / Peak power 1.5 kW / Battery Charging (external BMS)	10018412
vPOW_RE150.1-140-048-04-FA-LI-RC-NI	Regulator / 1.5 kW / 140 kHz / 48 V / Duty 40 % / Thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 48 VDC $\pm 5\%$ / Peak power 1.5 kW / No Battery Charging / Parallelizable output	10021454
vPOW_TPCP150.1-140-045-NI-R1	Charging Plate / 324 x 150 x 12 mm / IP54 / RAL 9004	10019007
vPOW_CX12-SP	Track Power Coaxial Cable between Pickup and Regulator / 12 A / Spring-cage connection F-Pickup	see page 24


* Linear Charging is also available.

VEHICLE EQUIPMENT FOR 24 V AND 48 V

U-PICKUP UXXX-140 AND REGULATOR REXXX



BLOCK DIAGRAM

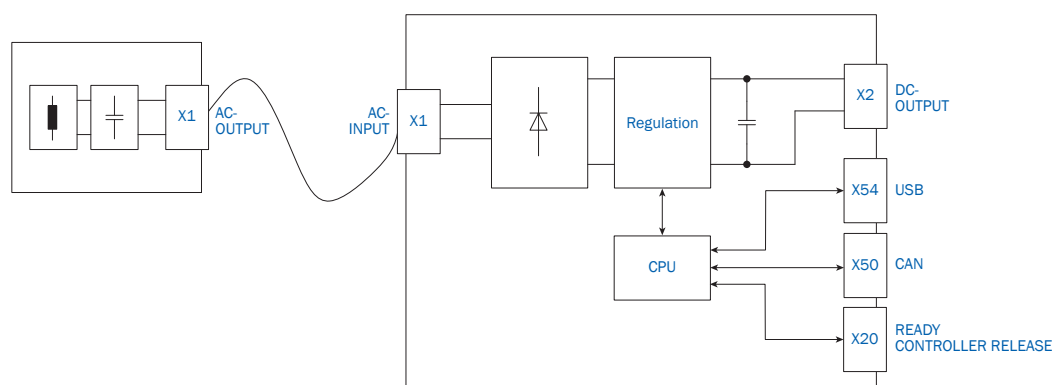

RANGE OF PRODUCTS

Description		Order No.
vPOW_U075.1-140-045-04-LO-LV	U-Pickup / 0.75 kW / 140 kHz / 45 A / Duty 40 % / Linear / Low Voltage / Nominal power 0.3 kW / Peak power 0.75 kW	10018447
vPOW_RE075.1-140-024-10-UA-AD-CA-NI	Regulator / 0.75 kW / 140 kHz / 24 V / Duty 100 % / Thermal monitoring / Advanced / CAN / No Auxilliary / Output voltage 24 VDC / Peak power 0.75 kW / Battery Charging (external BMS)	10021438
vPOW_RE075.1-140-024-04-UA-LI-RC-NI	Regulator / 0.75 kW / 140 kHz / 24 V / Duty 40 % / Thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 24 VDC $\pm 5\%$ / Peak power 0.75 kW / No Battery Charging / Parallelizable output	10018455
vPOW_U150.1-140-045-04-LO-LV	U-Pickup / 1.5 kW / 140 kHz / 45 A / Duty 40 % / Linear / Low Voltage / Nominal power 0.6 kW / Peak power 1.5 kW	10018448
vPOW_RE150.1-140-048-10-UA-AD-CA-NI	Regulator / 1.5 kW / 140 kHz / 48 V / Duty 100 % / Thermal monitoring / Advanced / CAN / No Auxilliary / Output voltage 48 VDC / Peak power 1.5 kW / Battery Charging (external BMS)	10017418
vPOW_RE150.1-140-048-04-UA-LI-RC-NI	Regulator / 1.5 kW / 140 kHz / 48 V / Duty 100 % / Thermal monitoring / LITE / Relay contact / No Auxilliary / Output voltage 48 VDC $\pm 5\%$ / Peak power 1.5 kW / No Battery Charging / Parallelizable output	10018456
vPOW_CX12-HU	Track Power Coaxial Cable between Pickup and Regulator / 12 A / Hotmelt connection U-Pickup	see page 24

TECHNICAL DATA

ELECTRICAL DATA

Peak power	0.75 / 1.5 kW
Nominal power	0.3 / 0.6 kW
Output voltage	24 / 48 VDC $\pm 5\%$
Output current max.....	31.3 / 31.3 A
Duty cycle.....	40% Duty (10 min cycle)
Track current	45 A
Track frequency.....	140 kHz

PROTECTION

Output over voltage.....	Yes
Output over current.....	Yes
Over temperature	Yes

REGULATOR MECHANICAL DATA

Dimension.....	245 x 156 x 90 mm
Mounting holes.....	235.3 x 99 mm
Weight	1 kg
Protection type	IP20
Ambient temperature.....	0 ... +40 °C non-condensing
Environment	General industrial






PICKUP CONNECTION CABLE

Length	0.5/1/1.5/2 m
Outer diameter	11 mm
Connections.....	Pre-terminated
Application	Flexible
Min. bending radius	8 x D


PICKUP MECHANICAL DATA

Dimension.....	128 x 86 x 84 mm
Mounting holes.....	104 x 68 mm
Weight	3 kg
Nominal airgap.....	15 mm (from top of track cable to bottom of Pickup)
Vertical tolerances	± 15 mm
Lateral tolerances	± 10 mm
Protection type	IP54
Color.....	RAL 9004
Ambient temperature.....	0 ... +40 °C non-condensing
Environment	General industrial
Cooling	Natural convection


DIMENSIONS

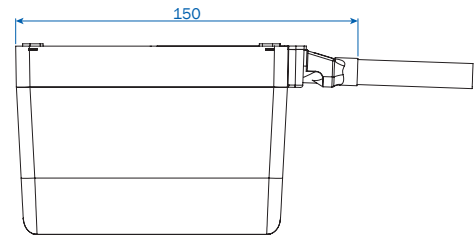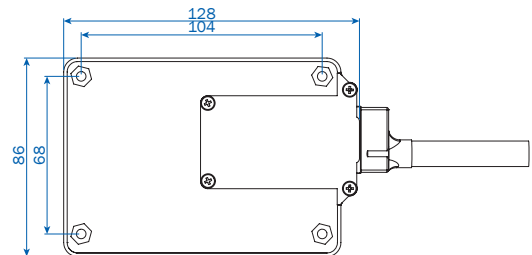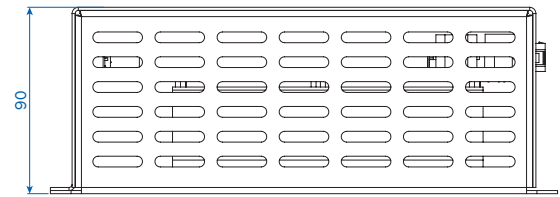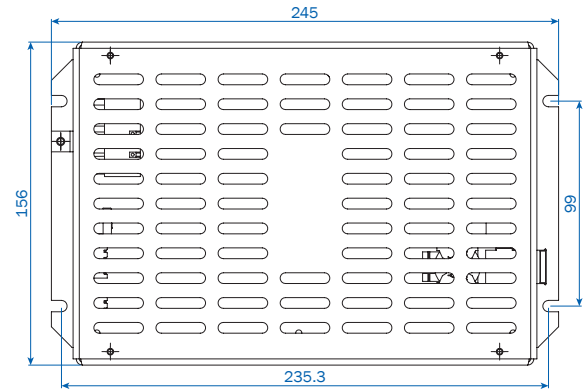

VEHICLE EQUIPMENT FOR 24 V
U-PICKUP U015

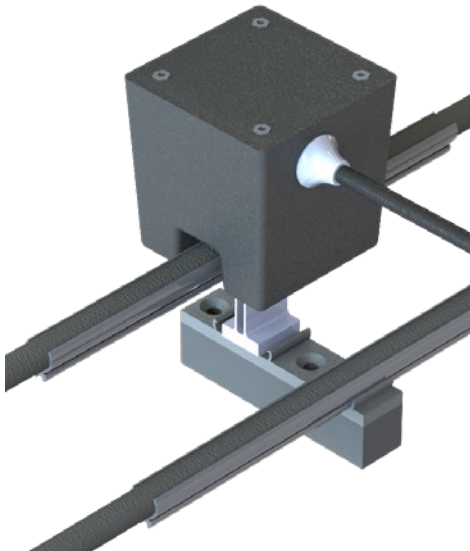

BLOCK DIAGRAM

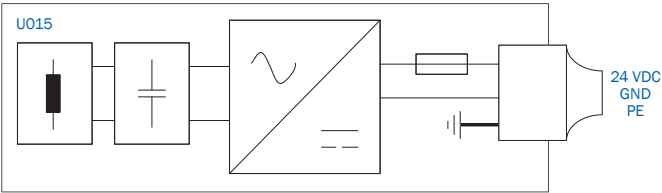

RANGE OF PRODUCTS

Description		Order No.
vPOW_U015.1-024-07-140-045-LN-NI-LO	U-Pickup / 0.15 kW / 24 VDC / ED 70 % / 140 kHz / 45 A / LITE / Not parallelizable / No interface / Linear / IP65 / Output voltage 24 VDC $\pm$ 10 % / Peak power 0.15 kW (0.5 sec)	10022728

TECHNICAL DATA

ELECTRICAL DATA

Peak power	0.15 kW
Nominal power	0.1 kW
Output voltage	24 VDC $\pm 10\%$
Output current max.....	6 A
Duty cycle.....	70%
Track current	45 A
Track frequency.....	140 kHz

PROTECTION

Output over current.....	Yes
Over temperature.....	Yes



PICKUP CONNECTION CABLE

Length	1 m
Outer diameter	6.5 mm
Connections.....	Pre-terminated
Application	Flexible
Min. bending radius	5 x D

PICKUP MECHANICAL DATA

Dimension.....	67.4 x 67.4 x 71 mm
Mounting holes.....	48 x 48 mm
Weight	650 g
Nominal airgap.....	4 mm (from top of track cable to bottom of Pickup)
Vertical tolerances	± 1 mm
Lateral tolerances	± 1 mm
Protection type	IP65
Color	RAL 9004
Ambient temperature.....	+5 ... +40 °C non-condensing
Environment	General industrial/ clean room
Cooling	Natural convection

DIMENSIONS

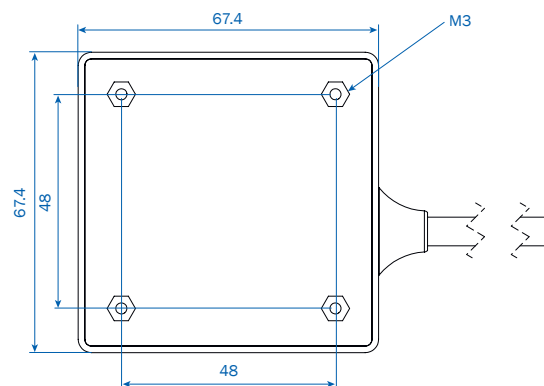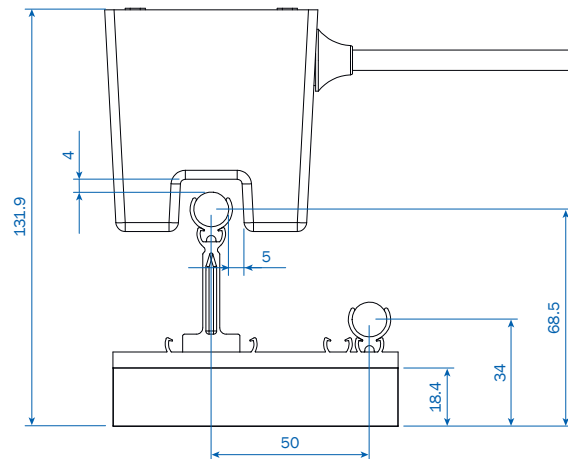

VEHICLE EQUIPMENT

MOBILE CABLE BETWEEN PICKUP AND REGULATOR



Coaxial cable spring-cage connection F-Pickup



Coaxial cable Hotmelt connection U-Pickup



Coaxial cable PowerCon connection E-Pickup

RANGE OF PRODUCTS

Description		Order No.
vPOW_CX12-10-SF	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 1.0 meter / Spring terminal connection F-Pickup / Diameter 11.2 mm / Bending radius 8xD	10018432
vPOW_CX12-20-SF	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 2.0 meter / Spring terminal connection F-Pickup / Diameter 11.2 mm / Bending radius 8xD	10018433
vPOW_CX12-40-SF	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 4.0 meter / Spring terminal connection F-Pickup / Diameter 11.2 mm / Bending radius 8xD	10018434
vPOW_CX12-60-SF	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 6.0 meter / Spring terminal connection F-Pickup / Diameter 11.2 mm / Bending radius 8xD	10018435
vPOW_CX12-05-HU	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 0.5 meter / Hotmelt connections U-Pickup / Diameter 11.2 mm / Bending radius 8xD	10020371
vPOW_CX12-10-HU	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 1.0 meter / Hotmelt connections U-Pickup / Diameter 11.2 mm / Bending radius 8xD	10020372
vPOW_CX12-15-HU	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 1.5 meter / Hotmelt connections U-Pickup / Diameter 11.2 mm / Bending radius 8xD	10020373
vPOW_CX12-20-HU	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 2.0 meter / Hotmelt connections U-Pickup / Diameter 11.2 mm / Bending radius 8xD	10020374
vPOW_CX12-05-PC	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 0.5 meter / PowerCon connection E-Pickup / Diameter 11.2 mm / Bending radius 8xD	10023617
vPOW_CX12-15-PC	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 1.5 meter / PowerCon connection E-Pickup / Diameter 11.2 mm / Bending radius 8xD	10023618
vPOW_CX12-35-PC	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 3.5 meter / PowerCon connection E-Pickup / Diameter 11.2 mm / Bending radius 8xD	10023619
vPOW_CX12-55-PC	Track Power Coaxial Cable between Pickup and Regulator / 12 A / 5.5 meter / PowerCon connection E-Pickup / Diameter 11.2 mm / Bending radius 8xD	10023620

VEHICLE EQUIPMENT

OVERVIEW CONFIGURATION PICKUP AND REGULATOR

[illegible]



PAUL VAHLE GmbH & Co. KG

Westicker Str. 52
59174 Kamen
Germany

Phone: +49 2307 704-0
info@vahle.de

www.vahle.com



VAHLE

VAHLE

VAHLE Incorporated

407 Cane Island Pkwy
Katy, TX, 77494, USA

Phone: +1 713-465-9796
sales@vahleinc.com

www.vahleinc.com

connect with us!
@vahleinc

