


U015 PICKUP

vPOWER



**NEW
PRODUCT
2019**

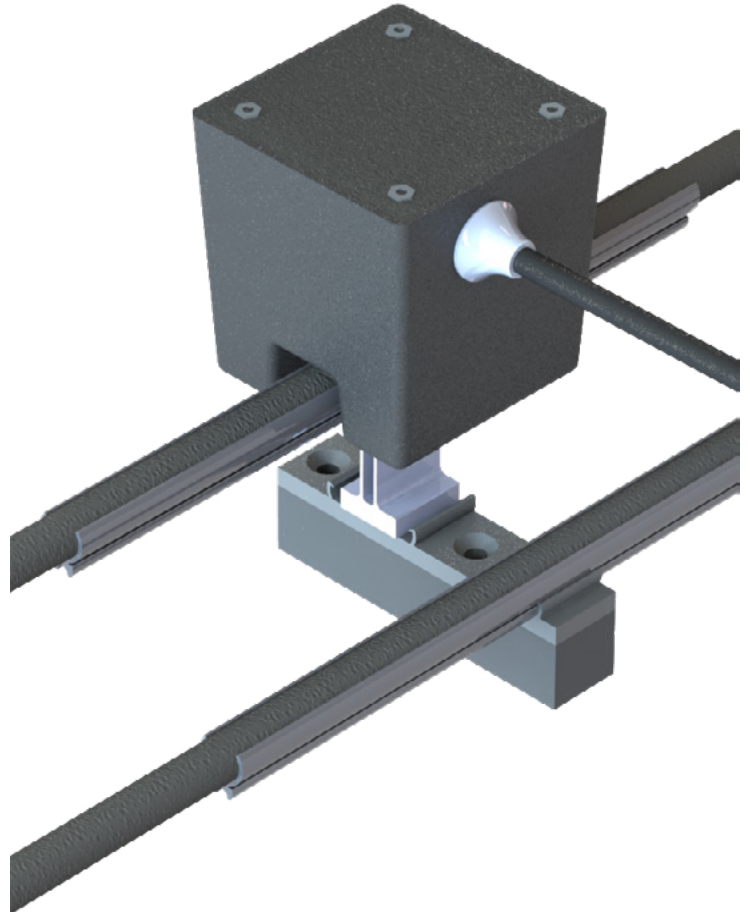

KEY SPECS

- Compact size
- Lightweight: Only 650 g
- 150 W peak power
- Output voltage: 24 VDC
- IP65
- Halogen / silicon free
- Internal strain relief
- 1 m pre assembled cable
- Acceleration up to 5 m/s²
- Plug and Play installation

vPOWER

U015 PICKUP

vPOWER

TECHNICAL DATA


ELECTRICAL DATA

Power Peak	Nominal Power	Duty Cycle
4 kW	1.6 kW	40%/20%
Track Current	Track Frequency	Track Conductor Spacing
45 A	140 kHz	61 mm
Output Voltage	Output Current	Protection
24 VDC	6.5 A	Polyfuse


MECHANICAL DATA

Dimensions	Mounting Holes	Weight
67.4x67.4x71.0 mm	48x48 mm	650 g
Nominal Airgap	Vertical Tolerances	Horizontal Tolerances
4 mm	±1 mm	±1 mm
Protection Rating	Connection Cable	Ambient Temperature (non-condensing)
IP65	1 m pre-assembled	0 to +40 °C
Environment	Cooling	
Industrial / clean room	Convection	


SYSTEM OVERVIEW

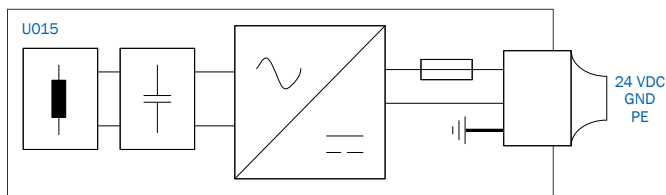


OUTPUT POWER

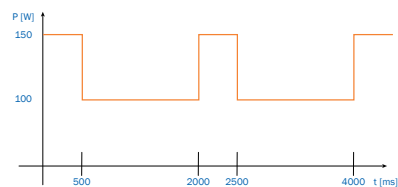

MOUNTING OVERVIEW

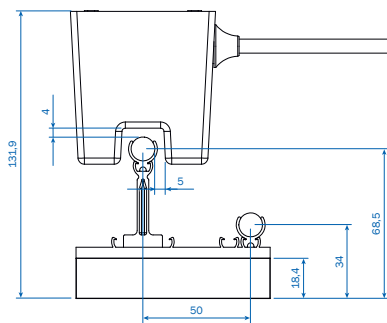

TOP VIEW

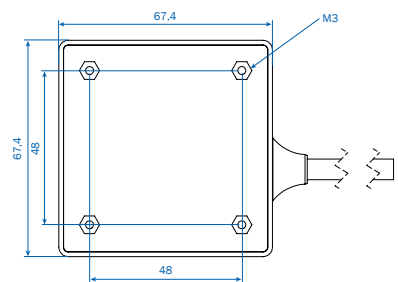

ORDERING INFORMATION

U015 Pickup	10022728
Spacer for compact hanger	10022382
Compact hanger	0915206/00
Spacer for cable clip	0915179/00
Cable clip 2 mm	0915298/00
Cable clip 20 mm	10024680

Spacer for feeding left	10001430
Spacer for feeding right	10001426
Feeding active conductor	0915295/00
Feeding passive conductor	0915296/00

VAHLE Incorporated.
407 Cane Island Pkwy
Katy, TX 77494

Tel.: 713-465-9796
Fax: 713-465-1851
E-Mail: salesinbox@vahleinc.com
www.vahleinc.com

FOLLOW US @VAHLEINC.

