


SMGM | SMGX

COMMUNICATION SYSTEMS

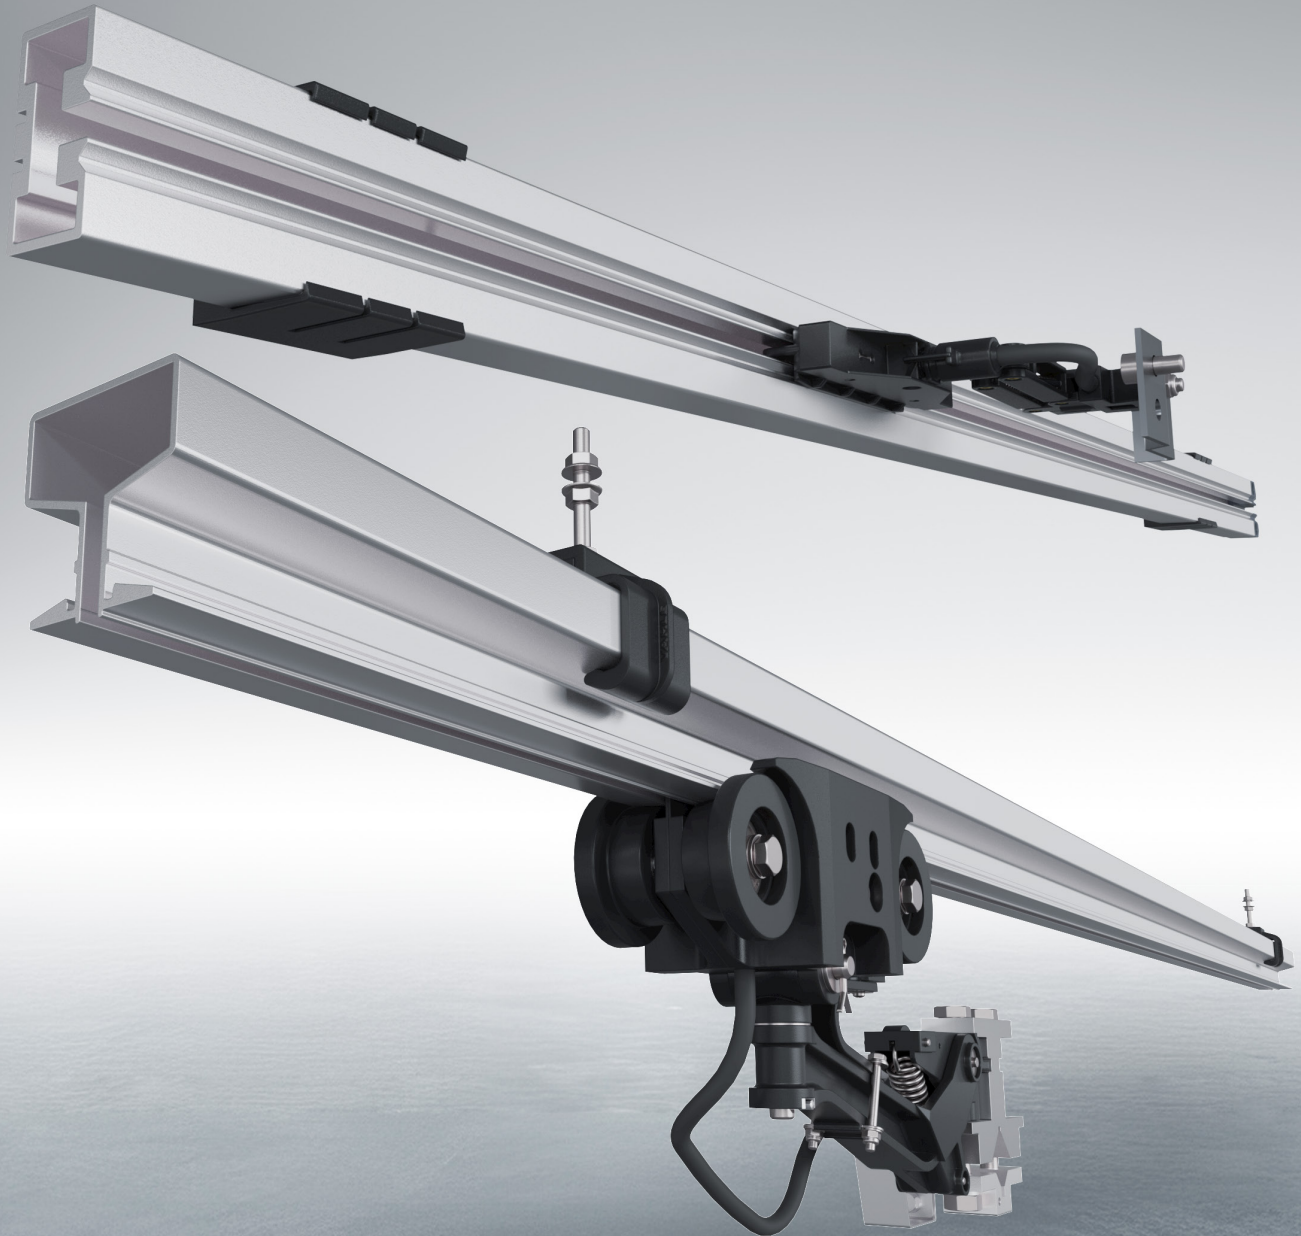

SMGM | SMGX – KEY HIGHLIGHTS


WIDE RANGE OF APPLICATIONS

With the vCOM product family for mobile data transmission, VAHLE serves indoor installations with the SMGM as well as outdoor installations with the SMGX. This product variety offers a selection for different segment lengths and mechanical tolerances.




STEADY SIGNAL QUALITY

Low-wear skids and a pressure spring provide a stable mechanical guide and steady immersion depth of the data coupler into the SMG profile, guaranteeing secure signals

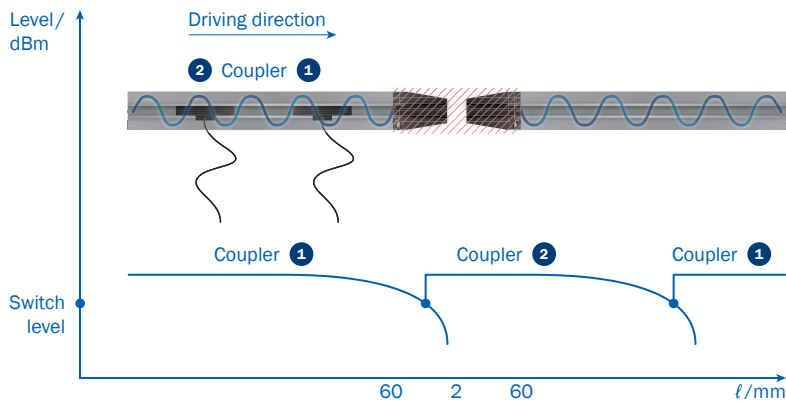


TRANSPARENT SYSTEM

Data transmission through SMGM occurs wirelessly within the SMG profile and no changes to the data occur during the transfer (packet-oriented). The SMGM interface does not require IP addresses.

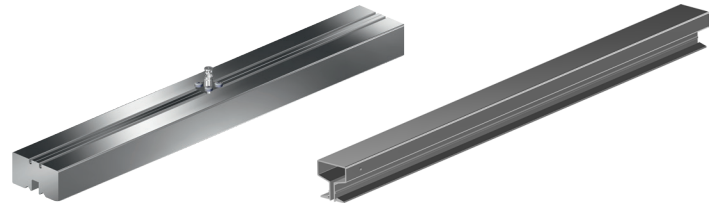


HF-SECURE

The SMG profile's interference-free design prevents signals from transmitting beyond the aluminum housing, allowing it to work alongside other industrial free radio systems. A radio license is not required. All HF components are factory tested and measured before each delivery,

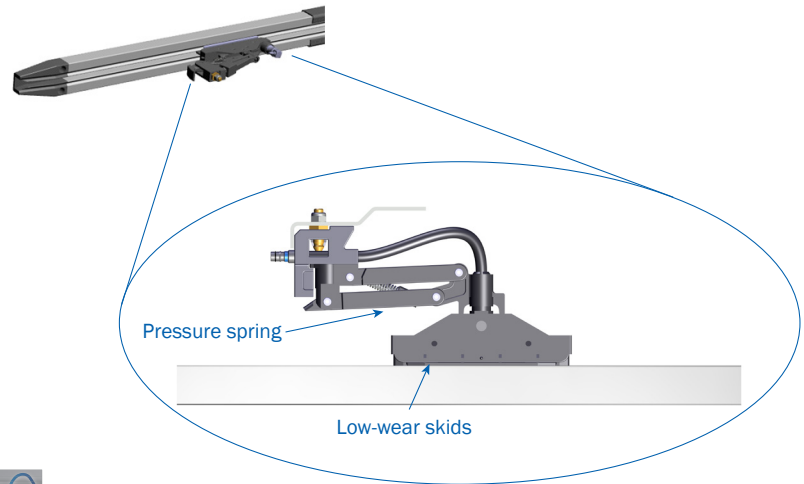

RELIABLE DATA TRANSMISSION

Connected data couplers ease segment transitions allowing for interruption-free data transmission. VAHLE's SMGM technology is suitable for use in people-safe applications.

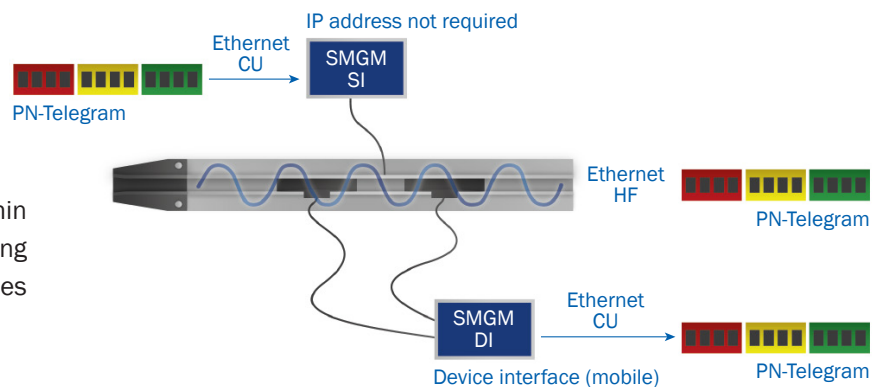

SMGM | SMGX – OPERATION


Modern production requires expansive volumes of data transmission for diagnosis and management. While this data is often transmitted for simple transport tasks in mobile applications via conductor lines with low transmission rates, this method of communication cannot stand up to the requirements of more complex applications that demand higher data rates. The data communication system SMGM (Slotted Microwave Guide Mini) was especially developed for these applications and enables the integration of fail-safe data transmission into proven VAHLE conductor systems.

The SMGM system is especially recommended for indoor applications, for example for EMS, skilnet and shuttle systems.


The SMGX system was developed on the basis of the SMGM system and is based on the same functional principle. The main differ-


FUNCTIONAL PRINCIPLE

The data transmission between the stationary management and the users on the mobile side occurs as locally restricted high frequency communication via slotted hollow conductor. The transmission path is divided into separately feeded segments due to the attenuation properties of the slotted hollow conductor mechanics. The maximum length of a segment is defined by the amount of users per segment and the used cable lengths. This is determined in the level calculation.

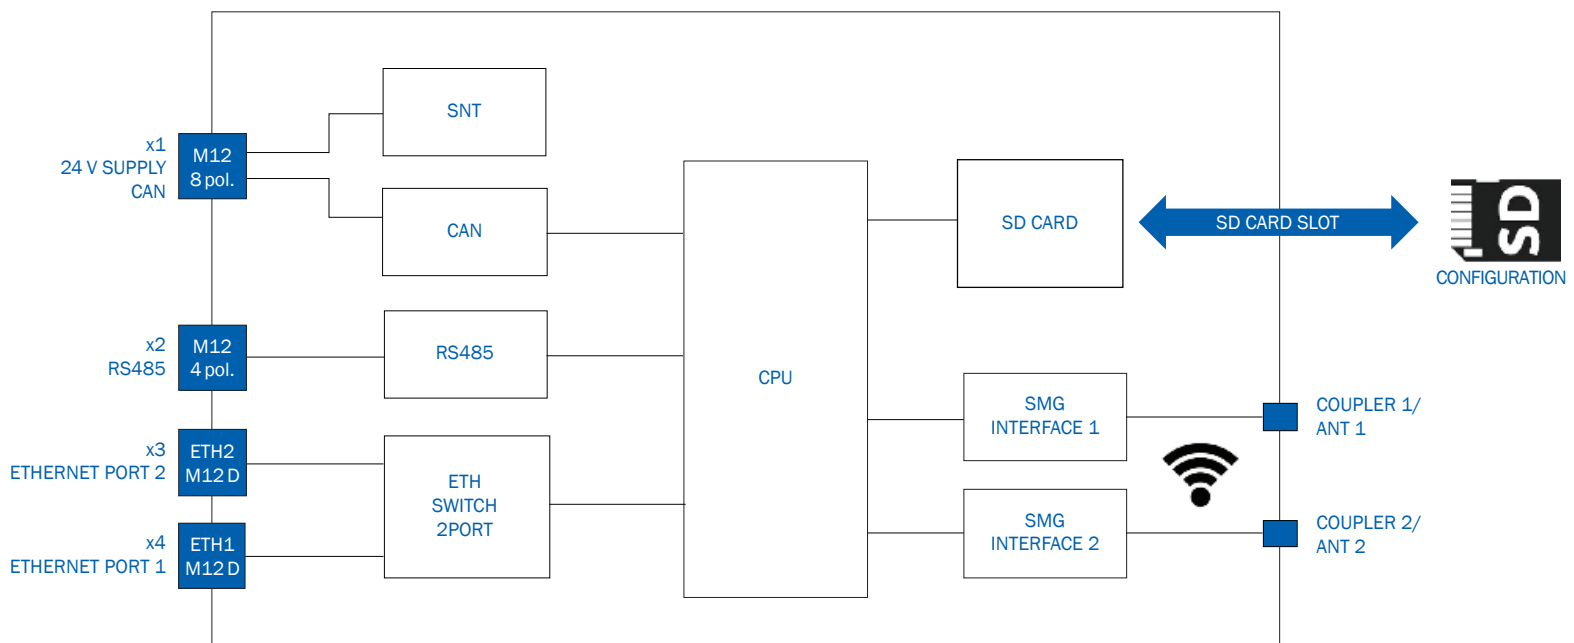

The vCOM interface has an Ethernet-based interface for connecting to the management (stationary side) and/or to the subordinate IO devices (mobile side). The SMGM and SMGX are optimized for both PROFINET-IO and PROFI-safe transmission.

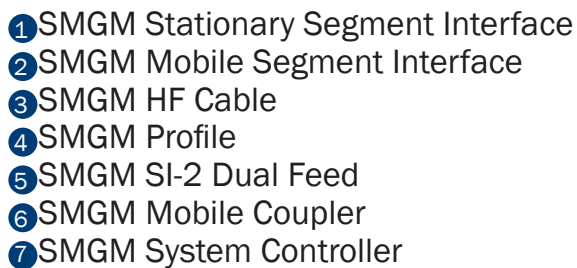

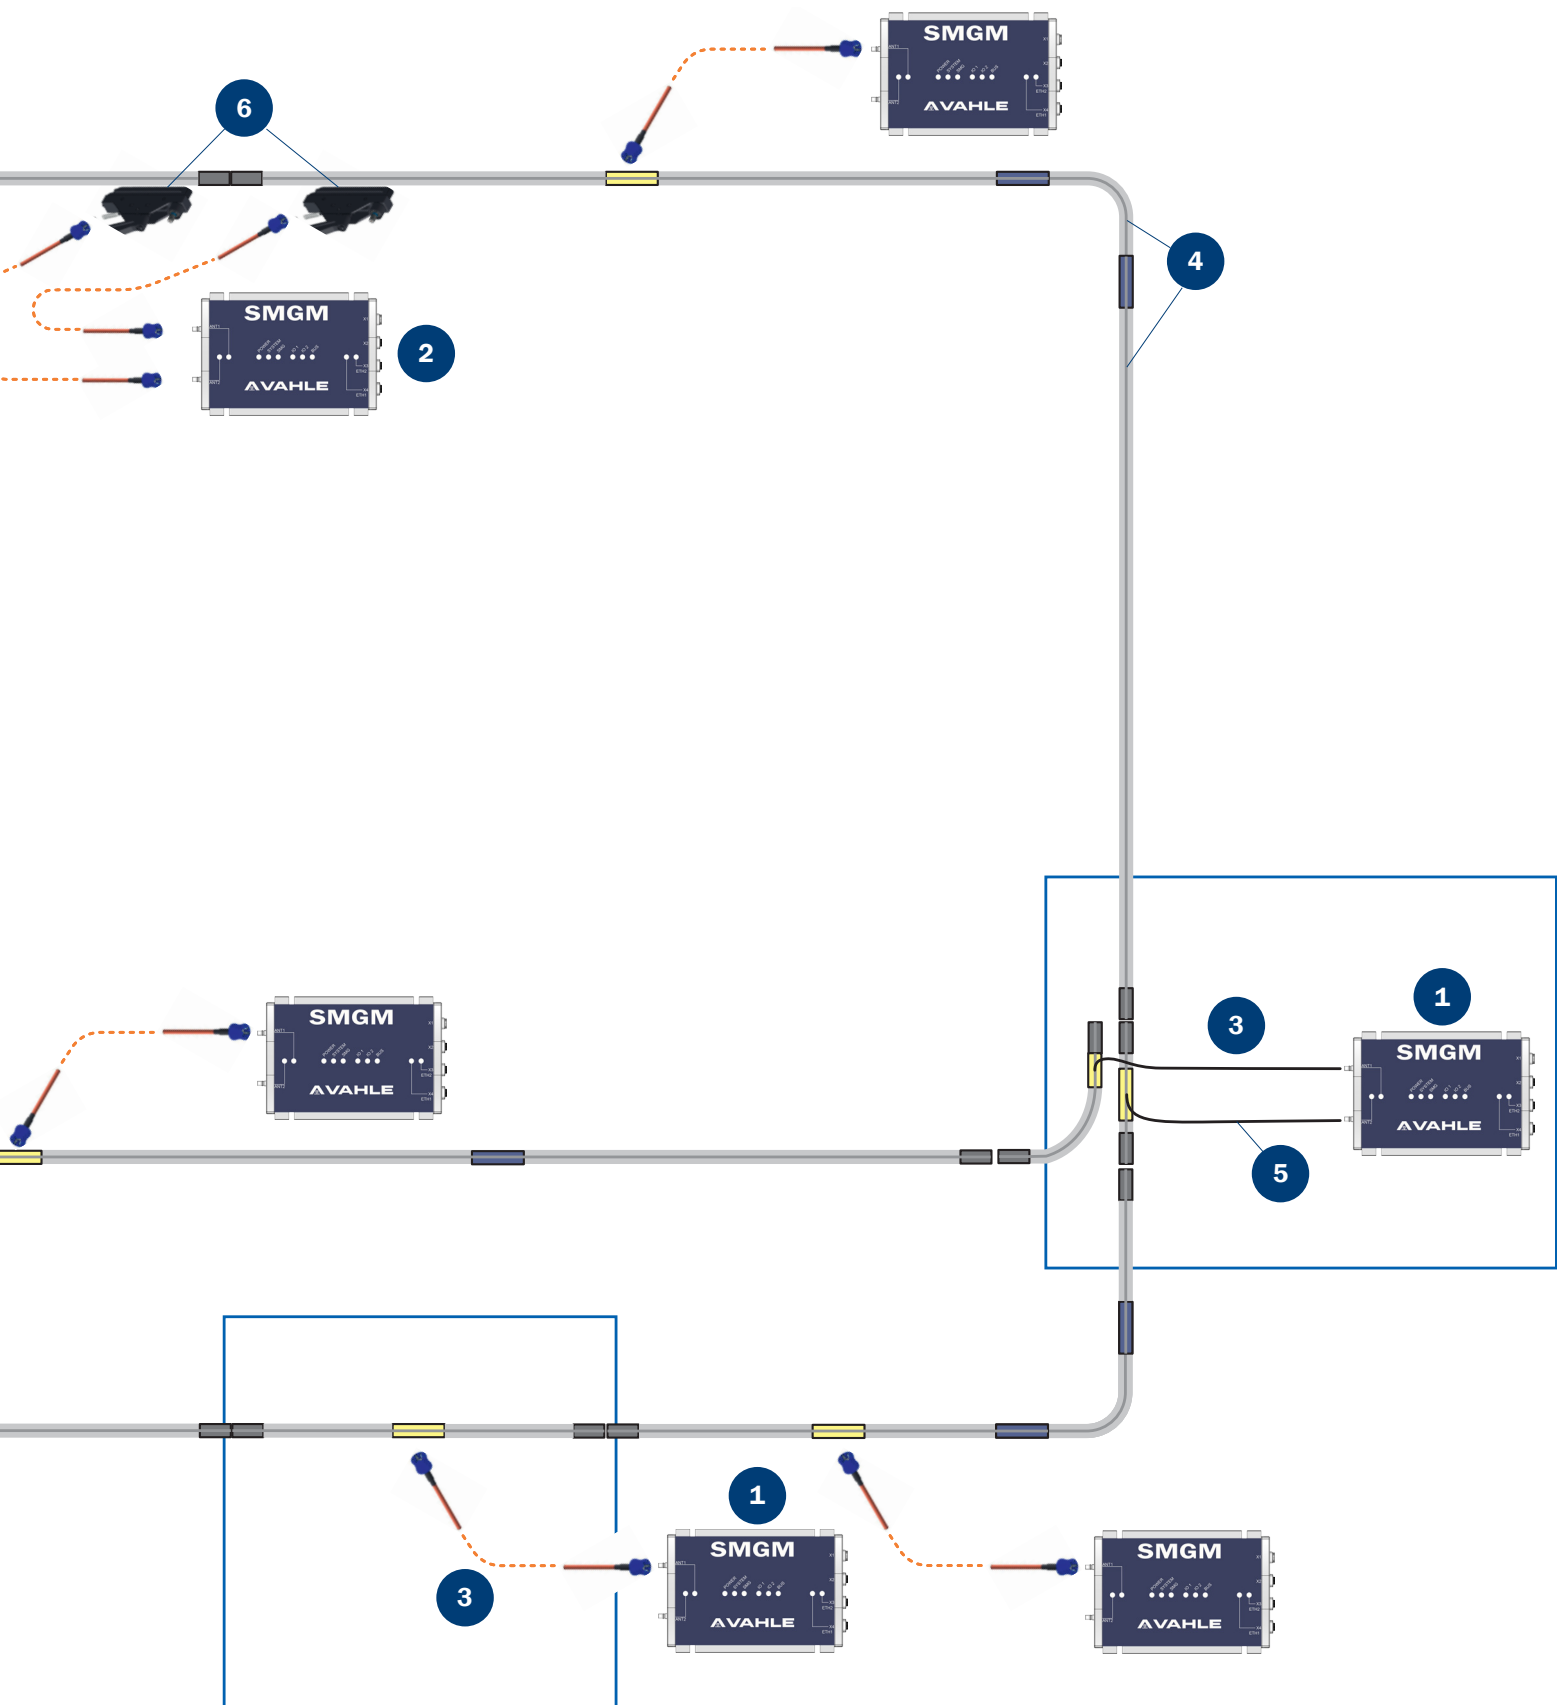

SMGM – DIAGNOSIS / SERVICE


COMPONENT AND SYSTEM QUALITY SURVEILLANCE

All SMGM components are under surveillance via the system controller regarding their availability. If one of the components becomes inoperative, a respective prompt will be sent to the superordinate management component/controller.

For safe operation, compliance with different communication parameters (e.g. levels) is necessary. The stationary interface permanently monitors the compliance of these system-relevant parameters. If one of these parameters is not met, the system controllers receives an error message via Ethernet which is then forwarded to the superordinate management component/controller.


DIAGNOSIS SEGMENT

The diagnosis segment provides the opportunity of HF related diagnosis (communication/reception quality) of mobile SMGM interfaces and the associated data couplers. A mechanically and electrically separate SMG rail segment must be defined for this process.

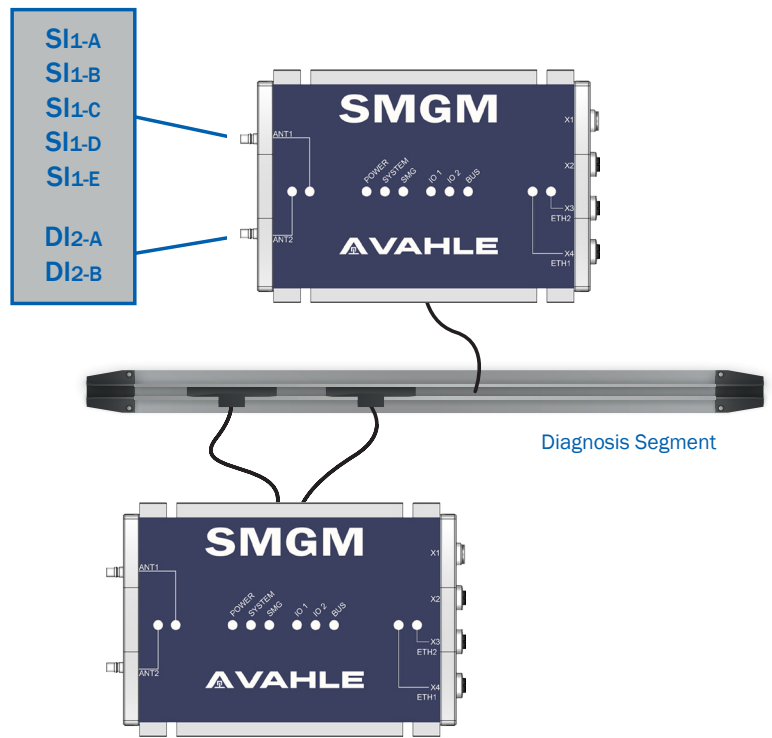

SERVICE – REPLACEMENT CONCEPT


All parameters relevant for operation are saved on the SD card of the SMG interface. During replacement, simply insert the SD card of the defective module into the SD card slot of the universally usable replacement unit (SMGM-RU). Module type and configuration are adopted via the SD card, without separate programming.

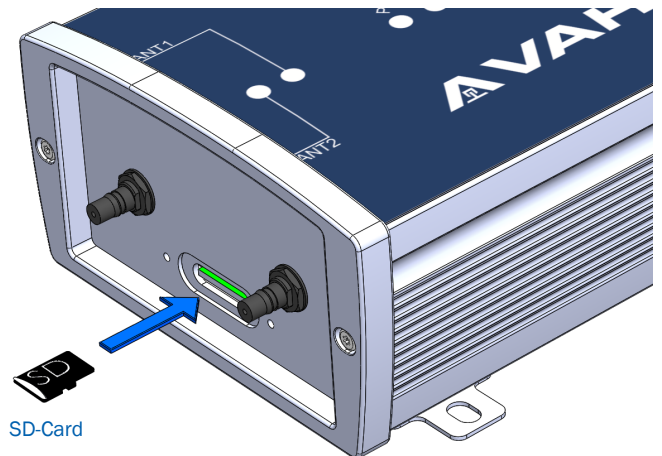

SMGM – SWITCH CONCEPT / SMGM-TC


SWITCH CONCEPT

For interruption-free communication, a stationary source interface's HF signal is split at feed switches to both turn-out segments via SMGM SI-2 module.

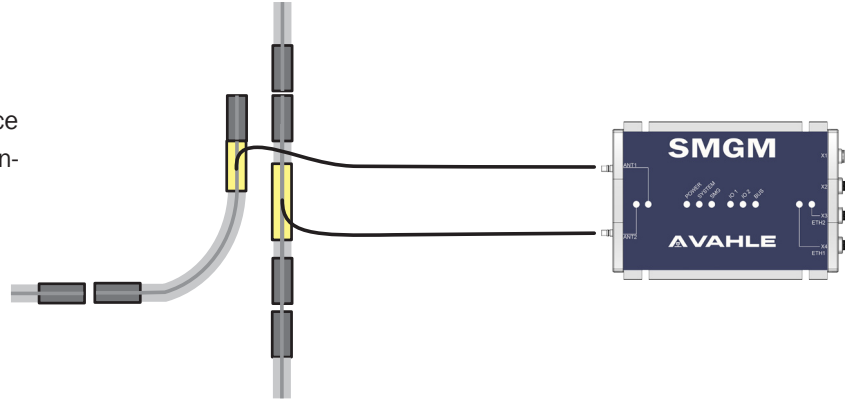

SMGX – SYSTEM OVERVIEW

- 1 SMGM Stationary Segment Interface
- 2 SMGM Mobile Segment Interface
- 3 SMGM HF Cable
- 4 SMGX Profile
- 5 SMGX Mobile Coupler

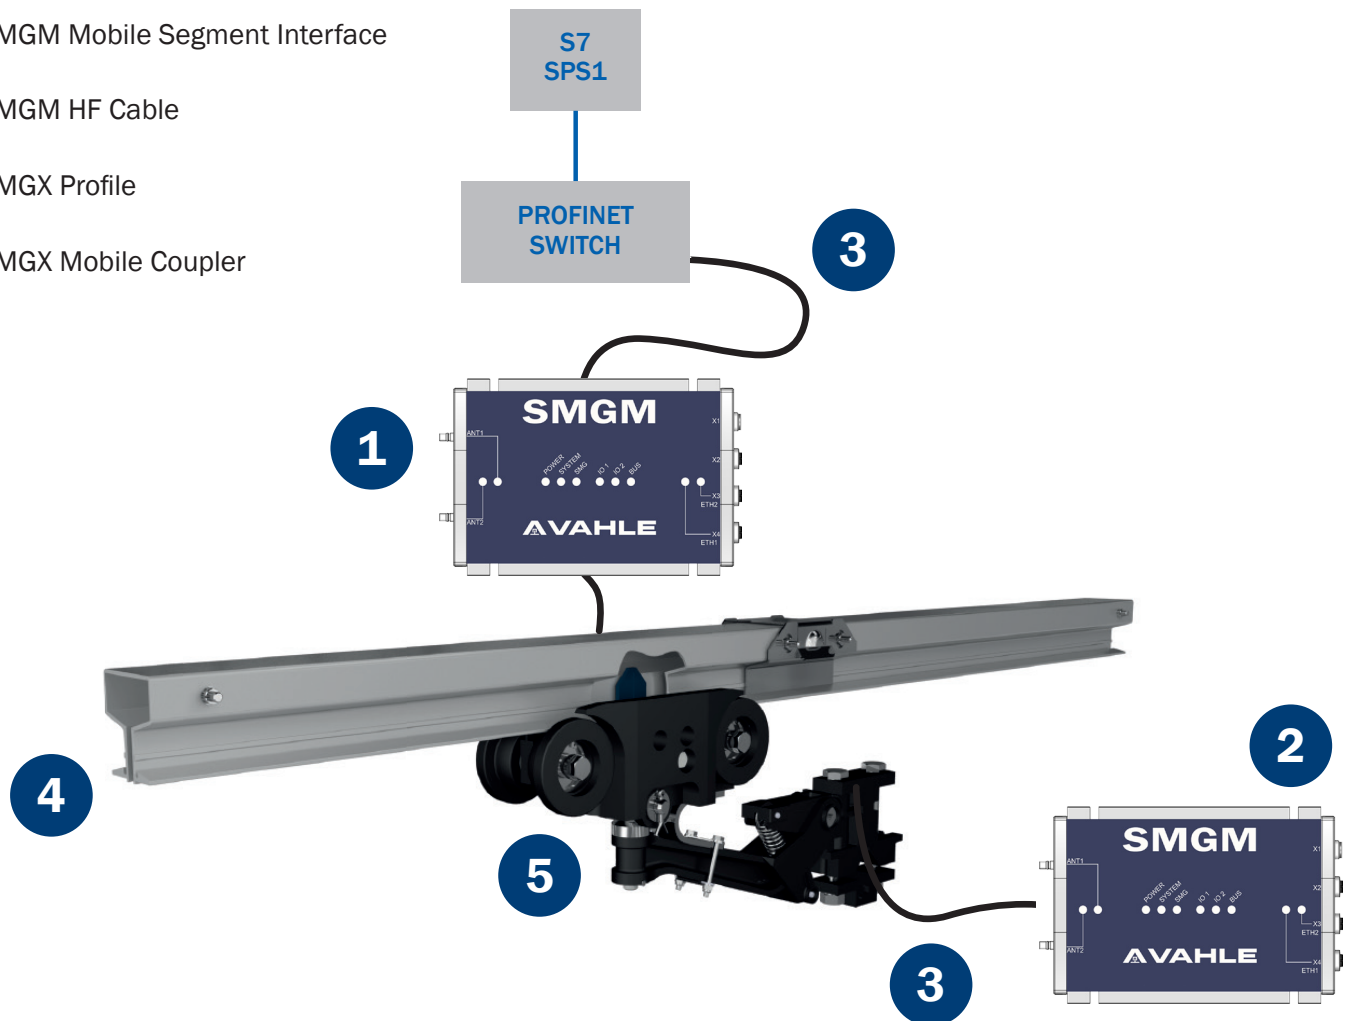

SMGM | SMGX – STATIONARY AND MOBILE INTERFACES

TECHNICAL DATA

Electrical data

Supply voltage 24 VDC ($\pm 10\%$)
 Power consumption Max. 500 mA
 Power input <12 W
 Start-up time <4 s

Ethernet interface

Data transmission 10 BASE-T, 100 BASE-TX
 Data rate 100 Mbit/s (gross)
 Switch functionality Dual-Port Switch
 Max. cable length 100 m (depending on the cable type)

Connections

Power supply 1x M12, 8-pole, A-coded
 (for BCC/SMGM-PN with system CAN-Bus)
 Ethernet ports 2x M12, 4-pole, D-coded
 RS485 connection 1x M12, 4-pole, A-coded
 HF connections 2x QLS
 SD-Card SD-Card slot

Ambient conditions

Operating temperature 0 °C ... 50 °C
 Storage temperature -15 °C ... 60 °C


Mechanical data

Protection type IP54
 Vibration resistance 3M4 (EN60721-3-3)
 Dimensions 183 x 118.3 x 63.4 mm
 Weight 850 g

Operating conditions

Field of application Indoor (SMGM), indoor and outdoor (SMGX)
 Speed Max. 180 m/min (SMGM),
 max. 300 m/min (SMGX)
 Curves Only available for SMGM (radius horizontal min.
 750 mm, vertical min. 1000 mm)

DIMENSIONS

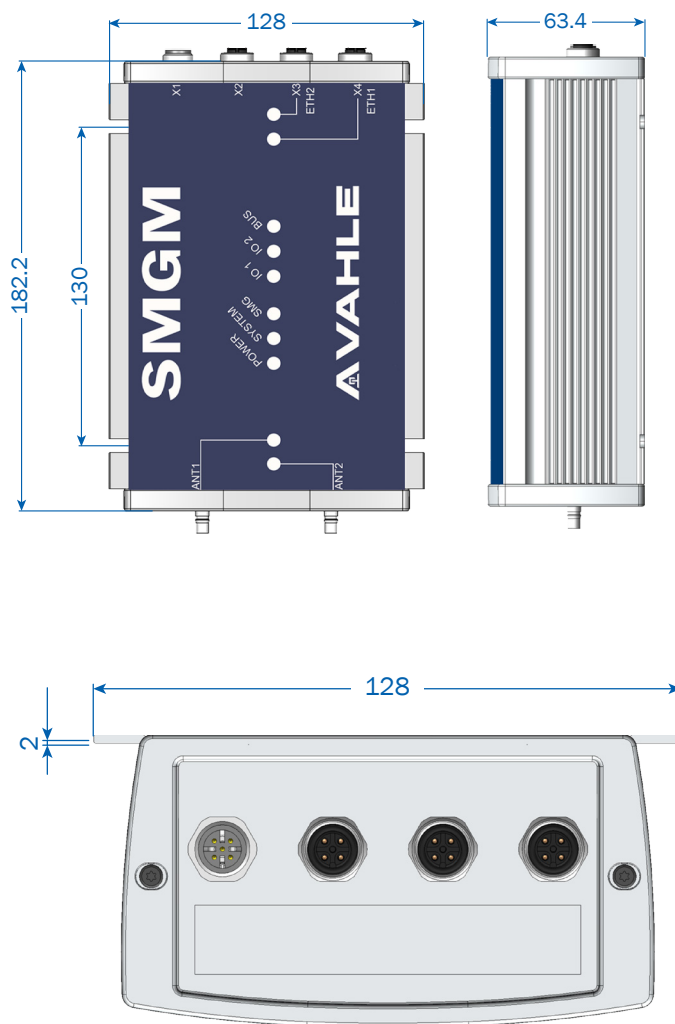

INFORMATION FOR USING INTERFACES

Only components of the same system can be used with each other. I.e. if the interface on the stationary side has „standard configuration,“ the interface on the mobile side must also have „standard configuration.“

The SMGM-RU is a universal spare unit. It is the only interface that can adopt the configuration of any other interface.

SMGM | SMGX – STATIONARY AND MOBILE INTERFACES

SYSTEM TYPES

LITE version

The LITE version is applied in applications with one segment and up to four mobile users.


Standard version

The Standard version is applied in applications with min. one segment and up to 15 mobile users.


Advanced version

The Advanced version is applied in applications with one segment and up to three mobile users.

LITE-Interface

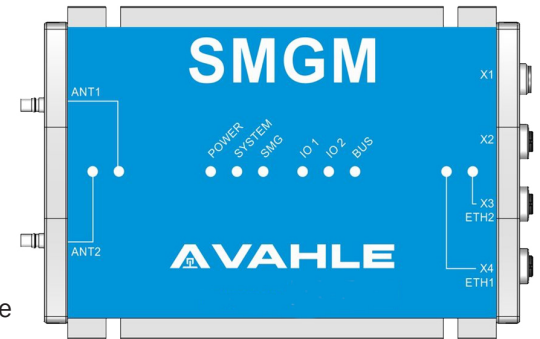

Standard / Advanced-Interface

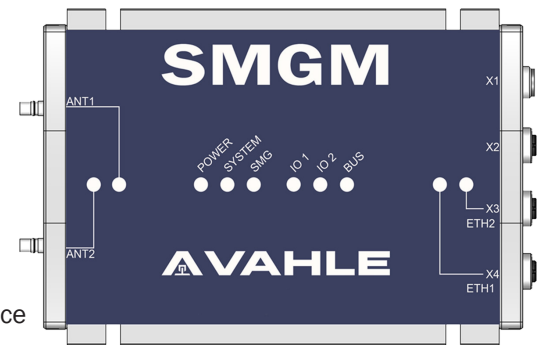

| System | Lite | | Standard | | Advanced | | Cross-System | |
|------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|--------------|--------------------|
| Stationary Interfaces | | | | | | | | |
| Description | SMGM-SI-1-LITE | | SMGM-SI-1 | SMGM-SI-2 | SMGM-SI-1-ADV | | SMGM-SC | SMGM-RU |
| No. of segments | 1 | | 1 | 2 | 1 | | 1 | (1) |
| Users per segment | 4 | | 15 | 15 | 3 | | 1 | (1) |
| Communication cycle | 16 ms | | 16 ms | 16 ms | 8 / 16 ms | | 16 ms | (1) |
| Process data transmission | Yes | | Yes | Yes | Yes (prioritized) | | Yes | Yes |
| Video data transmission | No | | No | No | Yes | | No | Yes ⁽¹⁾ |
| Mobile Interfaces | | | | | | | | |
| Description | SMGM-DI-ST1-LITE | SMGM-DI-DI2-LITE | SMGM-DI-ST2 | BCC/SMGM-PN | SMGM-DI-ST2-ADV | SMGM-DI-ST1-ADV | – | SMGM-RU |
| Transfer rate (gross) | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s |
| Transfer rate (net) ⁽²⁾ | | | | | | | – | (1) |
| No. of mobile coupler | 1 | 2 | 2 | 2 | 2 | 1 | – | (1) |
| Process data transmission | Yes | Yes | Yes | Yes | Yes | Yes | – | Yes ⁽¹⁾ |
| Video data transmission | No | No | No | No | Yes | Yes | – | Yes ⁽¹⁾ |
| Max. Segment Length | | | | | | | | |
| Type | SMGX | SMGM | SMGM | SMGM | SMGM | SMGX | SMGM | (1) |
| Mid-feeding | 200 m ⁽³⁾ | 180 m ⁽³⁾ | 120 m ⁽³⁾ | 120 m ⁽³⁾ | 140 m ⁽³⁾ | 500 m ⁽³⁾ | – | (1) |
| No. of mobile users | 4 | 4 | 15 | 15 | 3 | 3 | – | (1) |
| No. of mobile couplers | 1 | 2 | 2 | 2 | 2 | 1 | – | (1) |


(1) The properties of the SMGM-RU (Replacement Unit) depend on the configuration.

(2) Depends on system configuration / up-/downlink ratio.

SMGM | SMGX – STATIONARY INTERFACES

| Description | | System | Order No. |
|----------------|--|--------------|-----------|
| SMGM-SI-1-LITE | Segment Interface for one segment and max. four users | LITE | 10014867 |
| SMGM-SI-1 | Segment Interface for one segment and max. 15 users | Standard | 10011066 |
| SMGM-SI-2 | Segment Interface for two segments and max. 15 users | Standard | 10011064 |
| SMGM-SI-1-ADV | Segment Interface for one segment with ADV Configuration | Advanced | 10016752 |
| SMGM-SC | System Controller | Cross-System | 10011071 |
| SMGM-RU | Replacement Unit | * | 10015129 |


SMGM | SMGX – MOBILE INTERFACES

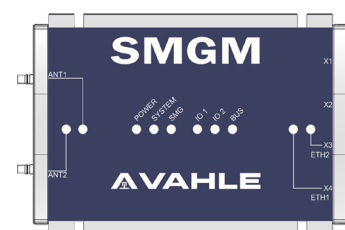


SMGM module

| Description | | System | Order No. |
|------------------|---|----------|-----------|
| SMGM-DI-ST1-LITE | Device Interface LITE for one mobile coupler | LITE | 10014897 |
| SMGM-DI-ST2-LITE | Device Interface LITE for two mobile couplers | LITE | 10014866 |
| SMGM-DI-ST2 | Device Interface Standard for two mobile couplers | Standard | 10011069 |
| SMGM-DI-ST1-ADV | Device Interface Advanced for one mobile coupler | Advanced | 10016753 |
| SMGM-DI-ST2-ADV | Device Interface Advanced for two mobile couplers | Advanced | 10016755 |
| SMGM-RU | Replacement Unit | * | 10015129 |

SMGM | SMGX CABLES

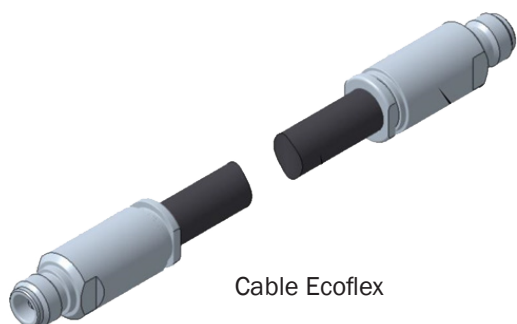

Cable Ecoflex

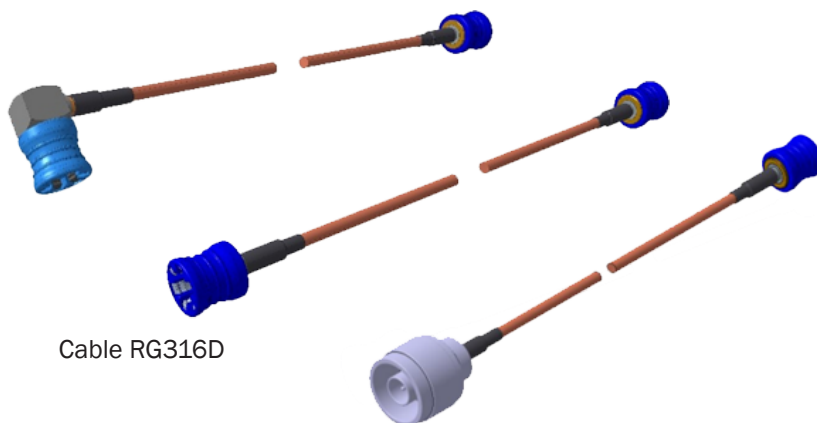

Cable RG316D


* The properties of the SMGM-RU (Replacement Unit) depend on the configuration.

SMGM | SMGX CABLES


| RANGE OF PRODUCTS: <5 M LENGTH | Length | Order No. |
|--|---------------|------------------|
| Connection cables Plug 0° to 0° | | |
| SMGM-VL-500-QLS-QLS-RG316D | 500 mm | 10011177 |
| SMGM-VL-1000-QLS-QLS-RG316D | 1000 mm | 10012478 |
| SMGM-VL-1500-QLS-QLS-RG316D | 1500 mm | 10012771 |
| SMGM-VL-2000-QLS-QLS-RG316D | 2000 mm | 10012320 |
| SMGM-VL-3000-QLS-QLS-RG316D | 3000 mm | 10012477 |
| Connection cables Plug 90° to 0° | | |
| SMGM-VL-500-QLS90-QLS-RG316D | 500 mm | 10009405 |
| SMGM-VL-1000-QLS90-QLS-RG316D | 1000 mm | 10009406 |
| SMGM-VL-1500-QLS90-QLS-RG316D | 1500 mm | 10011834 |
| SMGM-VL-2000-QLS90-QLS-RG316D | 2000 mm | 10009407 |
| SMGM-VL-2500-QLS90-QLS-RG316D | 2500 mm | 10014682 |
| SMGM-VL-3000-QLS90-QLS-RG316D | 3000 mm | 10009408 |
| SMGM-VL-4500-QLS90-QLS-RG316D | 4500 mm | 10022375 |
| SMGM-VL-5000-QLS90-QLS-RG316D | 5000 mm | 10009409 |

| RANGE OF PRODUCTS: >5 M LENGTH | Length | Order No. |
|---|---------------|------------------|
| Extension cables Plug N-socket to N-socket | | |
| SMG-VL-1000-NB-NB-ECOFLEX15 | 1000 mm | 10011174 |
| SMG-VL-1500-NB-NB-ECOFLEX15 | 1500 mm | 10014681 |
| SMG-VL-2000-NB-NB-ECOFLEX15 | 2000 mm | 10011175 |
| SMG-VL-2500-NB-NB-ECOFLEX15 | 2500 mm | 10011510 |
| SMG-VL-3000-NB-NB-ECOFLEX15 | 3000 mm | 10011512 |
| SMG-VL-4000-NB-NB-ECOFLEX15 | 4000 mm | 10011511 |
| SMG-VL-5000-NB-NB-ECOFLEX15 | 5000 mm | 10012879 |
| SMG-VL-5500-NB-NB-ECOFLEX15 | 5500 mm | 10022036 |
| SMG-VL-7000-NB-NB-ECOFLEX15 | 7000 mm | 10011838 |
| Extension cables Plug 90° to N-socket | | |
| SMGM-VL-500-QLS90-N-RG316D | 500 mm | 10011171 |
| SMGM-VL-750-QLS90-N-RG316D | 750 mm | 10011567 |
| SMGM-VL-1000-QLS90-N-RG316D | 1000 mm | 10008185 |
| SMGM-VL-1500-QLS90-N-RG316D | 1500 mm | 10011192 |
| SMGM-VL-2000-QLS90-N-RG316D | 2000 mm | 10011172 |
| SMGM-VL-2500-QLS90-N-RG316D | 2500 mm | 10011509 |
| SMGM-VL-3000-QLS90-N-RG316D | 3000 mm | 10011173 |
| Extension cables Plug 0° to N-socket | | |
| SMGM-VL-500-QLS-N-RG316D | 500 mm | 10011176 |
| SMGM-VL-750-QLS-N-RG316D | 750 mm | 10011568 |
| SMGM-VL-1000-QLS-N-RG316D | 1000 mm | 10012839 |
| SMGM-VL-1500-QLS-N-RG316D | 1500 mm | 10014148 |

SMGM | SMGX – PROFILE

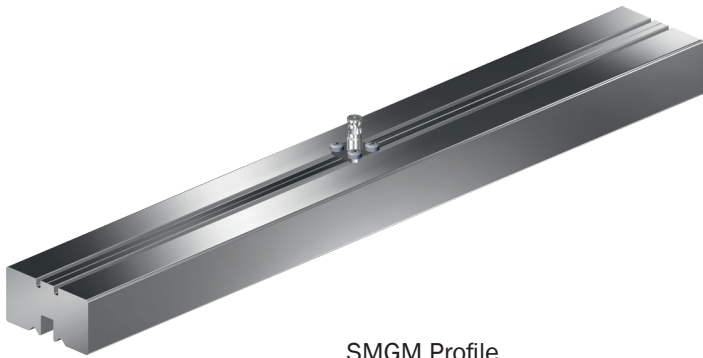

SMGM Profile

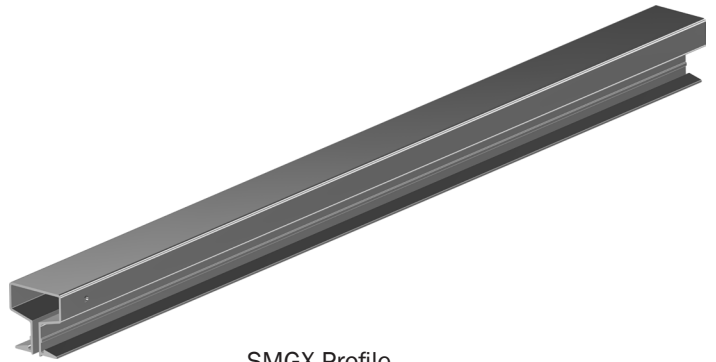


SMGX Profile

| Description | Order No. |
|--------------------------------|-----------|
| SMGM-Profile incl. accessories | P9999996* |
| SMGX-Profile incl. accessories | P9999996* |

SMGM | SMGX – PROFILE SUPPORT



SMGM-Solo-Hanger

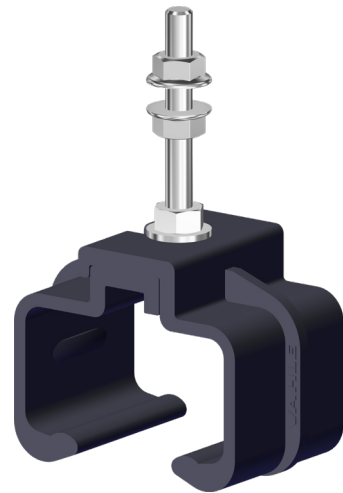


SMGX-Universalhanger


| Description | Max. support distance | Order No. |
|----------------------|-------------------------------|-----------|
| SMGM-Solo-Hanger | 1.5 m straight / 0.5 m curves | 10010543 |
| SMGX-Universalhanger | 2.5 m | 10019629 |

* It is a matter of a pseudo order number. Our Techsales will check the profile components in detail by ordering.

SMGM | SMGX – FUNNEL

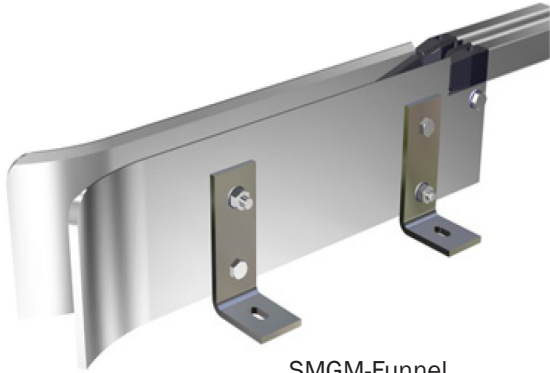

SMGM-Funnel

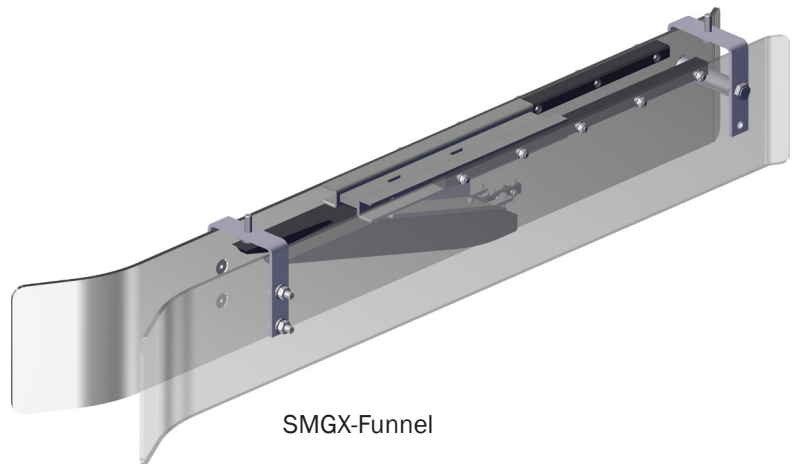

SMGX-Funnel

| Description | Order No. |
|-------------------|-----------|
| SMGM-Solo-Funnel | 10016778 |
| SMGM-Track-Funnel | 10017265 |
| SMGX-Funnel | 10017003 |

SMGM | SMGX – MOBILE COUPLER



SMGM-Coupler (short arm version)



SMGM-Coupler (long arm version)



SMGX-Coupler

| Description | Tolerance | Order No. |
|--|-------------------|-----------|
| SMGM system | | |
| SMGM-ANTFE-SAFK-01 (EHB) | ± 15 mm / ± 15 mm | 10015821 |
| SMGM-ANTFE-SAFK-02 (SKID) | ± 15 mm / ± 15 mm | 10015822 |
| SMGM-ANTFE-SAMK-KDS+V | ± 15 mm / ± 15 mm | 10028661 |
| SMGM-ANTFE-SAML-KDS+V | ± 30 mm / ± 50 mm | 10028660 |
| SMGM-GPMK+V (2-pole base plate for SMGM) | – | 10012066 |
| SMGX system | | |
| KWK-X:O-W150-45/60K-XB-N-4KT24-E50/A40+V | ± 40 mm / ± 50 mm | 10021964 |

SMGM – SUCTION HEADS




Suction head

| Description | | Order No. |
|--|------------------------------------|-----------|
| KWK-M:I-0000-00/00G-SAUG-U10EHB-E/A15+V | Suction head for EMS applications | 10025432 |
| KWK-M:I-0000-00/00G-SAUG-U10Skid-E/A15+V | Suction head for SKID applications | 10022431 |
| RS-SSL12/225 | Suction hose 225 mm | 10025433 |
| RS-SSL12/241 | Suction hose 241 mm | 10025434 |

SMGM – SYSTEM INTEGRATION

EXAMPLE: EMS APPLICATION*

- 1 In this application, the SMGM profile is mounted between the APOS Optic positioning system Datamatrix Code Strip and U10 profile as part of the EMS profile.
- 2 The SMGM mobile coupler is integrated between the APOS Optic reading head and the U10 current collector.
- 3 A special bracket provides a common mounting plate for the APOS Optic reading head, the U10 current collector and also for the SMGM mobile coupler.

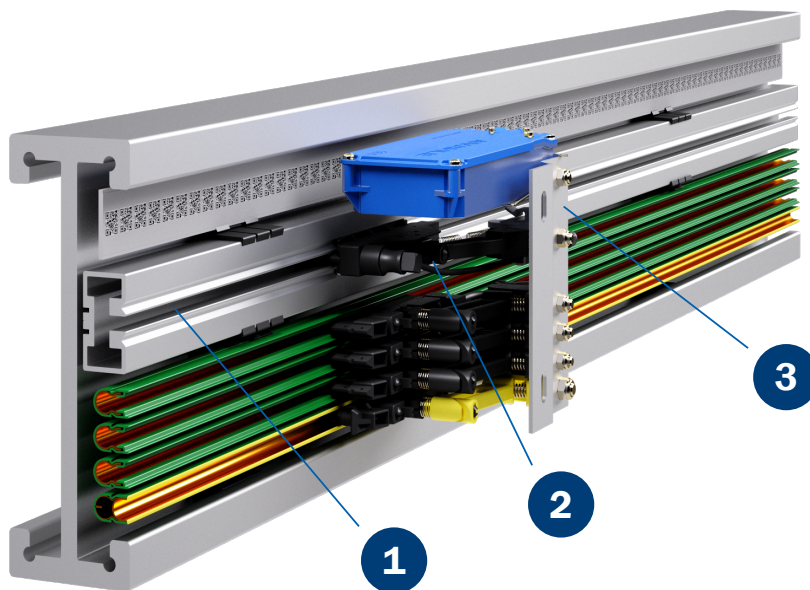


Download operation manuals and more at
<https://www.vahle.com/en/download>



* More system combinations are available on request, please contact our Techsales in case of need. Please take into account that the EMS components are not part of VAHLE delivery scope.


SMGX – HEATING

An optional heating system for the SMGX slotted microwave guide extends the application range to adverse environments. The system can also be retrofitted in existing installations and can be combined with a heating system of a VAHLE conductor system.

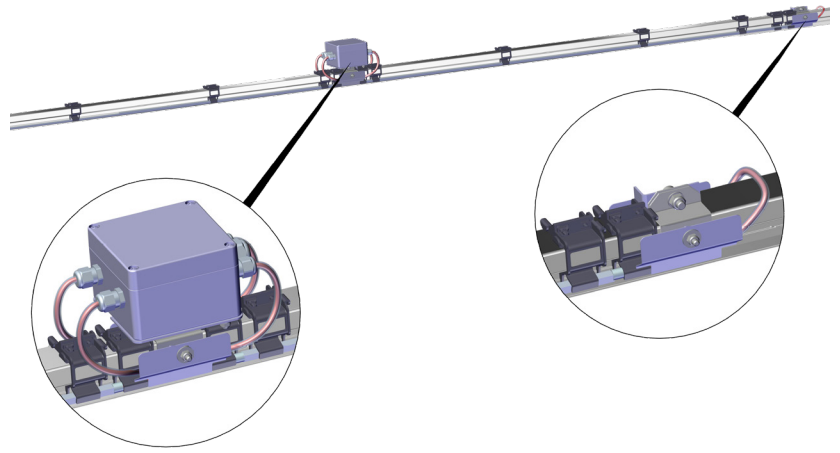


| Description | | Order No. |
|--|------------------------------------|-------------|
| PROFIL-X:HZ-G-6000+V | U profile for heating wire – 6 m | 10029009 |
| PROFIL-X:HZ-HBH-004+V | Mounting bracket | 10029008 |
| PROFIL-X:HZ-ESE+V | End feed | 10029022 |
| PROFIL-X:HZ-ESD+V | Center feed | 10029023 |
| PROFIL-X:HZ-EK+V | End clamp | 10029024 |
| HZU-230/50-16-MU-F1,5-VA-R0000-GA66-S005 | Switch cabinet with control system | 10014358* |
| HL-0,10-EYCEX-5203-PTFE-260-750 | Heating wire | 0196381/00* |

SMGX FOR STS CRANES (FESTOONLESS SOLUTION)

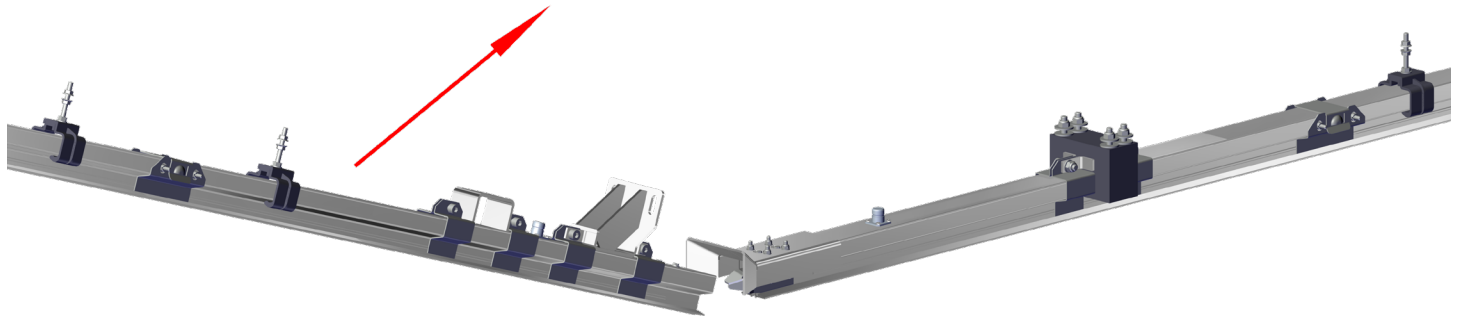

SMGX systems are also used on STS cranes (Ship-to-Shore) in ports. VAHLE offers a hinging boom for this purpose, which ensures smooth operation in this application.

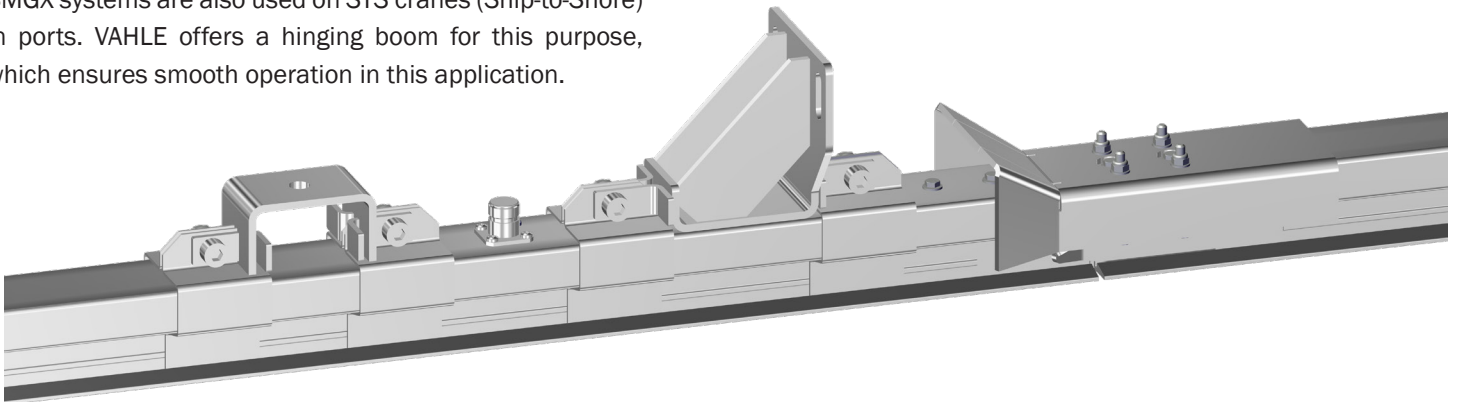

| Description | | Order No. |
|--|---|-----------|
| PROFIL-X:E-KLA-01+V | Hinging boom for SMGX on STS crane | 10028382 |
| PROFIL-X:E-G-0352-PV:A1-0-VERSCHL-EA:0+V | Protective cover as termination of the SMGX profile | 10022151 |

* Plant/project dependent



VAHLE, Inc.

**407 Cane Island Parkway
Katy, Texas 77494, USA**

**Phone: +1 713.465.9796
Fax: +1 713.465.1851**

**sales.usa@vahle.com
www.vahle.com**

**You can find your local contact at
www.vahle.com/contact**